

N4/Sx over IPSec

- Feature Summary and Revision History, on page 1
- Feature Description, on page 2
- Recommended Timers, on page 3
- Sample Configurations, on page 10
- Monitoring and Troubleshooting, on page 13

Feature Summary and Revision History

Summary Data

Table 1: Summary Data

Applicable Product(s) or Functional Area	5G-UPF
Applicable Platform(s)	VPC-SI SMI
Feature Default Setting	Enabled – Always-on
Related Changes in this Release	Not Applicable
Related Documentation	*UCC 5G UPF Configuration and Administration Guide*

Revision History

Revision Details	Release
First introduced.	2022.04.0


Feature Description

Internet Protocol Security (IPSec) is a suite of protocols that interact with one another to provide secure private communication across IP networks. These protocols allow the system to establish and maintain secure tunnels with peer security gateways. IPSec provides confidentiality, data integrity, access control, and data source authentication to IP datagrams.

In Cisco Cloud Native 5G, the IPSec functionality is available in Tunnel mode both on Session Management Function (SMF) and User Plane Function (UPF). The IPSec crypto-maps are associated under the appropriate interface on respective nodes. The IPSec tunnel is created between each SMF or UPF pair explicitly. This feature supports the IPv4 and IPv6 tunneling mode. There is no change on the N4/Sx service configuration.

The IPSec tunnel mode encapsulates the entire IP packet to provide a virtual secure hop between two gateways. It forms VPN kind of functionality, where entire IP packets are encapsulated inside another and delivered to the destination. It encapsulates the full IP header as well as the payload.

Figure 1: N4/Sx Over IPSec Tunnel

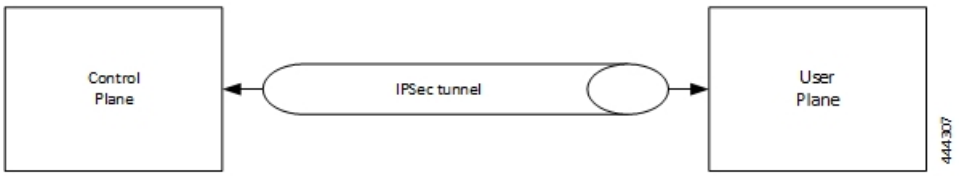

When N4/Sx over IPSec is enabled on UPF NF running VPP, then the following parameter must be used under "VPP Param" for the N4/Sx Over IPSec feature to work.

VPP_DPDK_DATA_SIZE=5120

The VPP Param is stored in the **staros_para.cfg** file on a CD-ROM and this configuration is read and applied to VPP by UPF during its boot.

Note This parameter is supported until VPP version 19.08. This parameter introduces a memory overhead of about 800 MB. You must consider this condition before using the feature. If the UPF has less RAM, then VM must be allocated with extra 1 GB of RAM memory for the feature to work properly.

For more information on IPSec support, see the StarOS *IPSec Reference*.

IKEv2 Keep-Alive Messages (Dead Peer Detection)

IPSec for N4/Sx interface supports IKEv2 keep-alive messages, also known as Dead Peer Detection (DPD), originating from both ends of an IPSec tunnel. As per RFC 3706, DPD is used to simplify the messaging required to verify communication between peers and tunnel availability.

IPSec DPD is an optional configuration. If its disabled, the IPSec node does not initiate DPD request. However, the node always responds to DPD availability messages initiated by peer node regardless of its DPD configuration.

The following method can be used to calculate the keep-alive interval value when N4/Sx over IPSec feature is configured:

```
((max-retransmissions + 1) * retransmission-timeout-ms) * 2
```

The keep-alive interval value specifies the time that the IPSec tunnel will remain up till DPD is triggered.

Example:

The following is a sample output of the **show configuration context** *context_name* **verbose** CLI command under N4/Sx service:

```
sx-service sx
   instance-type userplane
   bind ipv4-address 192.168.1.1 ipv6-address bbbb:abcd::11
   sxa max-retransmissions 4
   sxa retransmission-timeout-ms 5000
```

Here, the value of **max-retransmissions** is 4 and **retransmission-timeout-ms** is 5000. Therefore, the keep-alive interval value will be 50:

((max-retransmissions + 1) * retransmission-timeout-ms) * 2 = Keep-alive interval

((4+1) * 5000) * 2 = 50

IKESA Rekey

UPF supports both IKESA Rekey and IPSec Rekey.

For IKESA Rekey, the **lifetime** *interval* CLI must be configured under **ikev2-ikesa transform-set** *transform_set*. You must also configure **ikev2-ikesa rekey** under **crypto map** configuration. Following is a configuration example:

```
ikev2-ikesa transform-set ikesa-foo
   encryption aes-cbc-256
   group 14
   hmac sha2-256-128
   lifetime 28800
   prf sha2-256
...
...
...
crypto map foo0 ikev2-ipv4
   match address foo0
   authentication local pre-shared-key encrypted key secret_key
   authentication remote pre-shared-key encrypted key secret_key
   ikev2-ikesa max-retransmission 3
   ikev2-ikesa retransmission-timeout 15000
   ikev2-ikesa transform-set list ikesa-foo
   ikev2-ikesa rekey
   keepalive interval 50
   control-dont-fragment clear-bit
   payload foo-sa0 match ipv4
      ipsec transform-set list A-foo
      lifetime 600
      rekey keepalive
   #exit
   peer 172.19.222.2
   ikev2-ikesa policy error-notification
```

Recommended Timers

The following table provides the recommended timer values for CLI commands related to IPSec, N4/Sx, and SRP.

IPSec	SMF	UPF
ikev2-ikesa max-retransmission	*3*	*3*
ikev2-ikesa retransmission-timeout	*1000*	*1000*
keepalive	**interval** *4* **timeout** *1* **num-retry** *4*	**interval** *5* **timeout** *2* **num-retry** *4*
N4/Sx	**SMF**	**UPF**
sx-protocol heartbeat interval	*10*	*10*
sx-protocol heartbeat retransmission-timeout	*5*	*5*
sx-protocol heartbeat max-retransmissions	*4*	*4*
sxa max-retransmissions	*4*	*4*
sxa retransmission-timeout-ms	*5000*	*5000*
sxb max-retransmissions	*4*	*4*
sxb retransmission-timeout-ms	*5000*	*5000*
sxab max-retransmissions	*4*	*4*
sxab retransmission-timeout-ms	*5000*	*5000*
sx-protocol association reattempt-timeout	*60*	*60*
SRP	**SMF**	**UPF**
hello-interval	*3*	*3*
dead-interval	*15*	*15*

Recommended Configurations

Following are the recommended configurations and restrictions related to N4/Sx and SRP over IPSec:

- The multihop BFD timer between SMF and UPF must be seven seconds (for Data UPFs).
- The singlehop BFD must be enabled on all the contexts (SMF GW/Billing and UPF Gn/Gi).
- Inter-chassis multihop BFD must be enabled for SMF-SMF ICSR and UPF-UPF ICSR (IMS UPF).
- The SRP-IPSec ACL must be configured for TCP protocol instead of IP protocol.
- The N4/Sx-IPSec ACL must be configured for UDP protocol instead of IP protocol.

Example Configurations in SMF

Multihop BFD Configuration VPC-DI

The following is an example of multihop BFD configuration with seven seconds timer.

```
bfd-protocol
      bfd multihop-peer 209.165.200.226 interval 350 min_rx 350 multiplier 20
      bfd multihop-peer 209.165.200.227 interval 350 min_rx 350 multiplier 20
      bfd multihop-peer 209.165.200.225 interval 350 min_rx 350 multiplier 20
      bfd multihop-peer 209.165.200.230 interval 350 min_rx 350 multiplier 20
      bfd multihop-peer 209.165.200.228 interval 350 min_rx 350 multiplier 20
      bfd multihop-peer 209.165.200.229 interval 350 min_rx 350 multiplier 20
    #exit
```

Multihop BFD Configuration VPC-SI

The following is an example of multihop BFD configuration with three seconds timer.

```
bfd-protocol
      bfd multihop-peer 209.165.200.226 interval 150 min_rx 150 multiplier 20
      bfd multihop-peer 209.165.200.227 interval 150 min_rx 150 multiplier 20
      bfd multihop-peer 209.165.200.225 interval 150 min_rx 150 multiplier 20
      bfd multihop-peer 209.165.200.230 interval 150 min_rx 150 multiplier 20
      bfd multihop-peer 209.165.200.228 interval 150 min_rx 150 multiplier 20
      bfd multihop-peer 209.165.200.229 interval 150 min_rx 150 multiplier 20
    #exit
```

BGP Configuration

The following is an example of BGP configuration with recommended timers.

```
router bgp 1111
      router-id 209.165.200.225
      maximum-paths ebgp 15
      neighbor 209.165.200.250 remote-as 1000
      neighbor 209.165.200.250 ebgp-multihop
      neighbor 209.165.200.250 update-source 209.165.200.225
      neighbor 1111:2222::101 remote-as 1000
      neighbor 1111:2222::101 ebgp-multihop
      neighbor 1111:2222::101 update-source 1111:2222::1
      bgp graceful-restart restart-time 120
      bgp graceful-restart stalepath-time 300
      timers bgp keepalive-interval 30 holdtime-interval 90 min-peer-holdtime-interval 0
server-sock-open-delay-period 10
      address-family ipv4
        redistribute connected
      #exit
      address-family ipv6
        neighbor 1111:2222::101 activate
        redistribute connected
      #exit
    #exit
```

Singlehop BFD Configuration

The following is an example of singlehop BFD configuration with three seconds timer.

```
interface bgp-sw1-2161-10
      ip address 209.165.200.233 209.165.200.255
      ipv6 address 1111:222::9/112 secondary
      bfd interval 999 min_rx 999 multiplier 3
    #exit
    interface bgp-sw1-2161-11
```

```
  ip address 209.165.200.234 209.165.200.255
  ipv6 address 1111:222::10/112 secondary
  bfd interval 999 min_rx 999 multiplier 3
#exit
interface bgp-sw1-2161-12
  ip address 209.165.200.235 209.165.200.255
  ipv6 address 1111:222::11/112 secondary
  bfd interval 999 min_rx 999 multiplier 3
#exit
interface bgp-sw1-2161-3
  ip address 209.165.200.226 209.165.200.255
  ipv6 address 1111:222::2/112 secondary
  bfd interval 999 min_rx 999 multiplier 3
#exit
interface bgp-sw1-2161-4
  ip address 209.165.200.227 209.165.200.255
  ipv6 address 1111:222::3/112 secondary
  bfd interval 999 min_rx 999 multiplier 3
#exit
interface bgp-sw1-2161-5
  ip address 209.165.200.228 209.165.200.255
  ipv6 address 1111:222::4/112 secondary
  bfd interval 999 min_rx 999 multiplier 3
#exit
interface bgp-sw1-2161-6
  ip address 209.165.200.229 209.165.200.255
  ipv6 address 1111:222::5/112 secondary
  bfd interval 999 min_rx 999 multiplier 3
#exit
interface bgp-sw1-2161-7
  ip address 209.165.200.230 209.165.200.255
  ipv6 address 1111:222::6/112 secondary
  bfd interval 999 min_rx 999 multiplier 3
#exit
interface bgp-sw1-2161-8
  ip address 209.165.200.231 209.165.200.255
  ipv6 address 1111:222::7/112 secondary
  bfd interval 999 min_rx 999 multiplier 3
#exit
interface bgp-sw1-2161-9
  ip address 209.165.200.232 209.165.200.255
  ipv6 address 1111:222::8/112 secondary
  bfd interval 999 min_rx 999 multiplier 3
#exit
```

Static Route for Multihop BFD Configuration

The following is an example of static route multihop BFD configuration.

```
ip route static multihop bfd UP-5 209.165.200.240 209.165.200.245
    ip route static multihop bfd UP-6 209.165.200.240 209.165.200.246
    ip route static multihop bfd UP-9 209.165.200.240 209.165.200.247
    ip route static multihop bfd UP-10 209.165.200.240 209.165.200.248
    ip route static multihop bfd UP-7 209.165.200.240 209.165.200.249
    ip route static multihop bfd UP-8 209.165.200.240 209.165.200.250
```

Static Route for Singlehop BFD Configuration

The following is an example of static route singlehop BFD configuration.

```
ip route static bfd bgp-sw1-2161-3 209.165.200.230
    ip route static bfd bgp-sw1-2161-4 209.165.200.230
    ip route static bfd bgp-sw1-2161-5 209.165.200.230
    ip route static bfd bgp-sw1-2161-6 209.165.200.230
```

```
    ip route static bfd bgp-sw1-2161-7 209.165.200.230
    ip route static bfd bgp-sw1-2161-8 209.165.200.230
    ip route static bfd bgp-sw1-2161-9 209.165.200.230
    ip route static bfd bgp-sw1-2161-10 209.165.200.230
    ip route static bfd bgp-sw1-2161-11 209.165.200.230
    ip route static bfd bgp-sw1-2161-12 209.165.200.230
```

IPSec ACL Configuration

The following is an example IPSec ACL configuration in SMF.

```
ip access-list UP-1
      permit udp host 209.165.200.225 host 209.165.200.226
    #exit
```

IPSec Transform Set Configuration

The following is an example of IPSec Transform Set configuration in SMF.

```
ikev2-ikesa transform-set ikesa-UP-1
      encryption aes-cbc-256
      group 14
      hmac sha2-256-128
      lifetime 28800
      prf sha2-256

    ipsec transform-set A-UP-1
      encryption aes-cbc-256
      hmac sha2-256-128
      group 14
```

IPSec Crypto Map Configuration

The following is an example of IPSec Crypto Map configuration in SMF.

```
crypto map UP-1 ikev2-ipv4
      match address UP-1
      authentication local pre-shared-key encrypted key secretkey
      authentication remote pre-shared-key encrypted key secretkey
      ikev2-ikesa max-retransmission 3
      ikev2-ikesa retransmission-timeout 1000
      ikev2-ikesa transform-set list ikesa-UP-1
      ikev2-ikesa rekey
      keepalive interval 4 timeout 1 num-retry 4
      control-dont-fragment clear-bit
      payload foo-sa0 match ipv4
        ipsec transform-set list A-UP-1
        lifetime 300
        rekey keepalive
      #exit
      peer 209.165.200.224
      ikev2-ikesa policy error-notification
    #exit
```

N4/Sx Configuration

The following is an example of N4/Sx configuration in SMF.

```
sx-service SX-1
      instance-type controlplane
      sxa max-retransmissions 4
      sxa retransmission-timeout-ms 5000
      sxb max-retransmissions 4
      sxb retransmission-timeout-ms 5000
```

```
      sxab max-retransmissions 4
      sxab retransmission-timeout-ms 5000
      n4 max-retransmissions 4
      n4 retransmission-timeout-ms 5000
      sx-protocol heartbeat interval 10
      sx-protocol heartbeat retransmission-timeout 5
      sx-protocol heartbeat max-retransmissions 4
      sx-protocol compression
      sx-protocol supported-features load-control
      sx-protocol supported-features overload-control
    exit
end
```

Example Router Configurations

Static Routes for Interface

The following is an example configuration of static route for interface.

```
ip route 209.165.200.224/27 Vlan1111 209.165.200.225
ip route 209.165.200.224/27 Vlan1111 209.165.200.226
ip route 209.165.200.224/27 Vlan1111 209.165.200.227
ip route 209.165.200.224/27 Vlan1111 209.165.200.228
ip route 209.165.200.224/27 Vlan1111 209.165.200.229
ip route 209.165.200.224/27 Vlan1111 209.165.200.230
ip route 209.165.200.224/27 Vlan1111 209.165.200.231
ip route 209.165.200.224/27 Vlan1111 209.165.200.232
ip route 209.165.200.224/27 Vlan1111 209.165.200.233
ip route 209.165.200.224/27 Vlan1111 209.165.200.234
```

Static Routes for Singlehop BFD

The following is an example configuration of static route for singlehop BFD.

```
ip route static bfd Vlan1111 209.165.200.225
ip route static bfd Vlan1111 209.165.200.226
ip route static bfd Vlan1111 209.165.200.227
ip route static bfd Vlan1111 209.165.200.228
ip route static bfd Vlan1111 209.165.200.229
ip route static bfd Vlan1111 209.165.200.230
ip route static bfd Vlan1111 209.165.200.231
ip route static bfd Vlan1111 209.165.200.232
ip route static bfd Vlan1111 209.165.200.233
ip route static bfd Vlan1111 209.165.200.234
```

Interface for Singlehop BFD

The following is an example configuration of interface for singlehop BFD.

```
interface Vlan1111
  no shutdown
  bandwidth 10000000
  bfd interval 999 min_rx 999 multiplier 3
  no bfd echo
  ip address 209.165.200.224/27
  ipv6 address 1111:222::1/112
```

BGP Configuration

The following is an example of BGP configuration with recommended timers.

```
router bgp 1000
  router-id 209.165.200.226
```

```
  timers bgp 30 90
  timers bestpath-limit 300
  timers prefix-peer-timeout 30
  timers prefix-peer-wait 90
  graceful-restart
  graceful-restart restart-time 120
  graceful-restart stalepath-time 300
```

Example Configurations in UPF

IPSec ACL Configuration

The following is an example of IPSec ACL configuration in UPF.

```
ip access-list CP-1
      permit udp host 209.165.200.225 host 209.165.200.226
    #exit
```

IPSec Transform Set Configuration

The following is an example of IPSec Transform Set configuration in UPF.

```
ipsec transform-set A-CP-1
      encryption aes-cbc-256
      hmac sha2-256-128
      group 14

    ikev2-ikesa transform-set ikesa-CP-1
      encryption aes-cbc-256
      group 14
      hmac sha2-256-128
      lifetime 28800
      prf sha2-256
```

IPSec Crypto Map Configuration

The following is an example of IPSec Crypto Map configuration in UPF.

```
crypto map CP-1 ikev2-ipv4
      match address CP-1
      authentication local pre-shared-key encrypted key secretkey
      authentication remote pre-shared-key encrypted key secretkey
      ikev2-ikesa max-retransmission 3
      ikev2-ikesa retransmission-timeout 1000
      ikev2-ikesa transform-set list ikesa-CP-1
      ikev2-ikesa rekey
      keepalive interval 5 timeout 2 num-retry 4
      control-dont-fragment clear-bit
      payload foo-sa0 match ipv4
        ipsec transform-set list A-CP-1
      #exit
      peer 209.165.200.230
      ikev2-ikesa policy error-notification
    #exit
```

N4/Sx Configuration

The following is an example of N4/Sx configuration in UPF.

```
sx-service SX-1
      instance-type userplane
      sxa max-retransmissions 4
      sxa retransmission-timeout-ms 5000
```

```
      sxb max-retransmissions 4
      sxb retransmission-timeout-ms 5000
      sxab max-retransmissions 4
      sxab retransmission-timeout-ms 5000
      n4 max-retransmissions 4
      n4 retransmission-timeout-ms 5000
      sx-protocol heartbeat interval 10
      sx-protocol heartbeat retransmission-timeout 5
      sx-protocol heartbeat max-retransmissions 4
      sx-protocol compression
    exit
```

Example SRP Configurations

IPSec ACL Configuration

The following is an example of IPSec ACL configuration for SRP.

```
ip access-list SRP
      permit tcp host 209.165.200.227 host 209.165.200.228
    #exit
```

SRP Configuration

The following is an example of SRP configuration.

```
configure
  context srp
    bfd-protocol
      bfd multihop-peer 209.165.200.225 interval 999 min_rx 999 multiplier 3
    #exit
configure
  context srp
    service-redundancy-protocol
      chassis-mode primary
      hello-interval 3
      dead-interval 15
      monitor bfd context srp 209.165.200.226 chassis-to-chassis
      monitor bgp context gi-pgw 209.165.200.245
      monitor bgp context gi-pgw 3333:888::1
      monitor bgp context saegw 209.165.200.245
      monitor bgp context saegw 3333:888::2
      peer-ip-address 209.165.200.227
      bind address 209.165.200.228
    #exit
    ip route static multihop bfd srp 209.165.200.229 209.165.200.245
    ip route 209.165.201.1 209.165.202.129 209.165.200.230 SRP-Physical-2102
    ip route 209.165.201.2 209.165.202.130 209.165.200.231 SRP-Physical-2102
    ip route 209.165.201.3 209.165.202.131 209.165.200.232 SRP-Physical-2102
    ip igmp profile default
    #exit
  #exit
end
```

Sample Configurations

In following sample configuration, the N4/Sx and IPSec interface IP Addresses are defined as:

```
SMF N4/Sx - 192.0.2.1
UPF N4/Sx - 192.0.2.7
```

```
SMF IPSec - 198.51.100.1
UPF IPSec - 198.51.100.2
```

Note

- For this release, following are the recommended timer values on UPF:

  ```
  sx-protocol heartbeat retransmission-timeout 20
  sx-protocol heartbeat max-retransmissions 3
  ```

- For this release, following are the recommended timer values on SMF:

  ```
  sx-protocol heartbeat retransmission-timeout 20
  sx-protocol heartbeat max-retransmissions 5
  ```

Control Plane

IPSec Configuration

```
config
  context EPC-CP
    ip access-list foo0
      permit ip host 192.0.2.1 host 192.0.2.7
    #exit
    ipsec transform-set A-foo
    #exit
    ikev2-ikesa transform-set ikesa-foo
    #exit
    crypto map foo0 ikev2-ipv4
      match address foo0
      authentication local pre-shared-key key secret
      authentication remote pre-shared-key key secret
      ikev2-ikesa max-retransmission 3
      ikev2-ikesa retransmission-timeout 15000
      ikev2-ikesa notify-msg-error no-apn-subscription backoff-timer 0
      ikev2-ikesa notify-msg-error network-failure backoff-timer 0
      ikev2-ikesa transform-set list ikesa-foo
      ikev2-ikesa configuration-attribute p-cscf-v6 private length 0
      ikev2-ikesa configuration-attribute p-cscf-v6 iana length 0
      keepalive interval 50
      payload foo-sa0 match ipv4
        ipsec transform-set list A-foo
        lifetime 300
        rekey keepalive
      #exit
      peer 198.51.100.2
      ikev2-ikesa policy error-notification
      notify-payload error-message-type ue base 0
      notify-payload error-message-type network-transient-minor base 0
      notify-payload error-message-type network-transient-major base 0
      notify-payload error-message-type network-permanent base 0
    #exit
    interface CP_IPSEC loopback
      ip address 198.51.100.1 255.255.255.0
   crypto-map foo0
    #exit
end
```

N4/Sx Configuration

```
   sx-service SX-1
      instance-type controlplane
      bind ipv4-address 192.0.2.1
```

```
      sx-protocol heartbeat retransmission-timeout 20
      sx-protocol heartbeat max-retransmissions 5
   exit
```

User Plane

IPSec Configuration

```
config
  context EPC-UP
    ip access-list foo0
      permit ip host 192.0.2.7 host 192.0.2.1
    #exit
    ipsec transform-set A-foo
    #exit
    ikev2-ikesa transform-set ikesa-foo
    #exit
    crypto map foo0 ikev2-ipv4
      match address foo0
      authentication local pre-shared-key key secret
      authentication remote pre-shared-key key secret
      ikev2-ikesa max-retransmission 3
      ikev2-ikesa retransmission-timeout 15000
      ikev2-ikesa notify-msg-error no-apn-subscription backoff-timer 0
      ikev2-ikesa notify-msg-error network-failure backoff-timer 0
      ikev2-ikesa transform-set list ikesa-foo
      ikev2-ikesa configuration-attribute p-cscf-v6 private length 0
      ikev2-ikesa configuration-attribute p-cscf-v6 iana length 0
      keepalive interval 50
      payload foo-sa0 match ipv4
        ipsec transform-set list A-foo
      #exit
      peer 198.51.100.1
      ikev2-ikesa policy error-notification
      notify-payload error-message-type ue base 0
      notify-payload error-message-type network-transient-minor base 0
      notify-payload error-message-type network-transient-major base 0
      notify-payload error-message-type network-permanent base 0
    #exit
    interface UP_IPSEC  loopback
      ip address 198.51.100.2 255.255.255.0
   crypto-map foo0
    #exit
end
```

N4/Sx Configuration

```
   sx-service SX-1
      instance-type userplane
      bind ipv4-address 192.0.2.7 ipv6-address dddd:51:31:1:209::
      sxa max-retransmissions 12
      sxb max-retransmissions 12
      sxab max-retransmissions 12
      sx-protocol heartbeat interval 30
      sx-protocol heartbeat retransmission-timeout 20
      sx-protocol heartbeat max-retransmissions 3
    exit
```

To validate the IPSec tunnel CLI on the SMF protocol pod and validate the *ipsec.yaml* file on SMF, see the *Interfaces Support > N4 Interface* chapter for sample SMI strongSwan configuration.

For the latest strongSwan configurations, see the *Ultra Cloud Core Subscriber Microservices Infrastructure Operations Guide*.

Monitoring and Troubleshooting

This section contains the sample CLI command output of show commands for the N4/Sx over IPSec feature in both SMF and UPF.

show crypto ikev2-ikesa security-associations summary

```
I - Initiator
  R - Responder
Mgr                                                                    Lifetime
ID  VPN Local IPSec GW:Port   Remote IPSec GW:Port  State             /Remaining
=== === ==================== ==================== ================ ===========
54  2   192.168.170.55 :500   192.168.196.55 :500   AUTH_COMPLETE(I) 86400/16448

1 IKEv2 Security Association found in this context.
```

show crypto ipsec security-associations summary

```
+------ SA state:           (E) - Established
      |                          (P) - Partially Established
      |                          (N) - No SAs
      |
      |+----- Rekey/Keepalive:    (D) - Rekey Disabled
      ||                          (E) - Rekey Enabled/No Keepalive
      ||                          (K) - Rekey Enabled/Keepalive
      ||
      ||+---- Crypto Type:        (D) - Dynamic Map
      |||                         (I) - IKEv1 Map
      |||                         (J) - IKEv2 Map
      |||                         (M) - Manual Map
      |||                         (C) - CSCF Map
      |||
      |||
      VVV           Map Name                                                 Rekeys En Pkts
    De Pkts
===== === ============================================================== ====== ==========
 ==========
1     EDJ foo0                                                              0      3496
     3496

1 Crypto Map Found.
1 Crypto Map Established.
```

To validate the IPSec tunnel CLI on the SMF protocol pod and validate the *ipsec.yaml* file on SMF, see the *Interfaces Support > N4 Interface* chapter for sample SMI strongSwan configuration.

For the latest strongSwan configurations, see the *Ultra Cloud Core Subscriber Microservices Infrastructure Operations Guide*.