

QoS: Policing and Shaping Configuration Guide, Cisco IOS XE 17 (Cisco NCS 4200 Series)

First Published: 2025-03-18

Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
http://www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED “AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: https://www.cisco.com/c/en/us/about/legal/trademarks.html. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2025 Cisco Systems, Inc. All rights reserved.



CONTENTS

CHAPTER 1 **Feature History** 1

CHAPTER 2 **Class-Based Policing** 3

Information About Class-Based Policing 3

Class-Based Policing Functionality 3

Benefits of Class-Based Policing 3

Restrictions for Class-Based Policing 4

How to Configure Class-Based Policing 4

Configuring a Traffic Policing Service Policy 4

Monitoring and Maintaining Traffic Policing 6

Verifying Class-Based Traffic Policing 7

Troubleshooting Tips 8

Configuration Examples for Class-Based Policing 9

Example Configuring a Service Policy That Includes Traffic Policing 9

Verifying Class-Based Traffic Policing 10

Additional References 11

CHAPTER 3 **Port-Shaper and LLQ in the Presence of EFPs** 13

Restrictions for Port-Shaper and LLQ in the Presence of EFPs 13

Information About Port-Shaper and LLQ in the Presence of EFPs 14

Ethernet Flow Points and LLQ 14

How to Configure Port-Shaper and LLQ in the Presence of EFPs 14

Configuring Hierarchical Policy Maps 14

Configuring Class-default Port-Shaper Policy Maps 16

Configuring Port-Shaper Policy Maps 17

Configuring an LLQ Policy Map 19


Configuring Port Level Shaping on the Main Interface with Ethernet Flow Points 20
Configuration Examples for Port-Shaper and LLQ in the Presence of EFPs 23
Example: Configuring Hierarchical QoS Port Level Shaping on the Main Interface with EFPs 23
Configuration Example: Class-default Port-Shaper and EFP policy 23
Example: Configuring Port Level Shaping on the Main Interface with EFPs 24
Additional References 24

CHAPTER 4 Control Plane Policing 27
Information About Control Plane Policing 27
Control Plane Policing Overview 27
Benefits of Control Plane Policing 28
Control Plane Terms to Understand 29
Supported Protocols 29
Input Rate-Limiting and Silent Mode Operation 31
Restrictions for Control Plane Policing 32
Restrictions for CoPP on the RSP3 32
IP Access List Overview 33
Benefits 34
Benefits of IP Access Lists 34
IP Address Range-Based Filtering Support for CoPP ACL 35
How to Use Control Plane Policing 35
Defining Control Plane Services 35
Verifying Control Plane Services 37
Configuring Control Plane Policing to Mitigate Denial-of-Service Attacks 38
Configuring CoPP ACL Template 40
Configuring CoPP ACL Template 41
Configuration Examples for Control Plane Policing 42
Example: Configuring Control Plane Policing on Input Telnet Traffic 42
Verification Examples for CoPP 43
Additional References 44

CHAPTER 5 QoS Overhead Accounting 45
Restrictions for QoS Overhead Accounting 45
OH Accounting Support for L3VPN 46

How to Configure QoS Overhead Accounting 47
Applying Overhead Accounting on a Particular Interface 47
Configuring Number of Bytes to be Accounted 47
Configuring Overhead Accounting for MPLS Imposition 47
Verifying Overhead Accounting compensation 47
Apply OH Accounting on a Particular L3VPN Interface 48
Configure Number of Bytes to be Accounted 48
Verify OH Accounting Compensation 48

CHAPTER 6 **Policer Adjustment in QoS Policy Map** 49
Restrictions for Policer Adjustment 49
How to configure Policer Adjustment 50
Enabling Policer Adjustment 50
Disabling Policer Adjustment 50
Viewing QoS Policer Values for Ingress Traffic 50
Monitoring QoS Policer Values 51
Configuring the display of ASIC QoS Policer Values for Egress Traffic 51

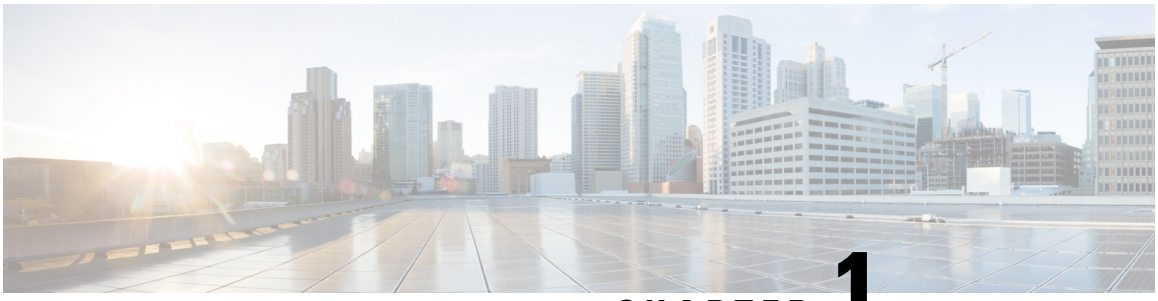

CHAPTER 1


Feature History

The following table lists the new and modified features that are supported in the QoS: Policing and Shaping Configuration Guide in Cisco IOS XE 17 releases, on Cisco NCS 4201 and Cisco NCS 4202 routers.

Feature	Description
Cisco IOS XE Bengaluru 17.5.1	
IP Address Range-Based Filtering Support for CoPP ACL	This feature supports Ingress on In-band Management Loopback interface and Ingress on Data plane interface to block traffic using MPLS. Both, Source IP and Destination IP based filtering are supported on NCS 4206 and NCS 4216; however, only Source IP based filtering is supported on the NCS 4201 and NCS 4202 routers.

The following table lists the new and modified features that are supported in the QoS: Policing and Shaping Configuration Guide in Cisco IOS XE 17 releases, on Cisco NCS 4206 and Cisco NCS 4216 routers.

Feature	Description
Cisco IOS XE Bengaluru 17.5.1	
IP Address Range-Based Filtering Support for CoPP ACL	This feature supports Ingress on In-band Management Loopback interface and Ingress on Data plane interface to block traffic using MPLS. CoPP ACL also enables you to configure the **830** and **5432** ports on the Cisco router. This is only applicable to NCS 4206 and NCS 4216 routers. Both, Source IP and Destination IP based filtering are supported on NCS 4206 and NCS 4216; however, only Source IP based filtering is supported on the NCS 4201 and NCS 4202 routers.

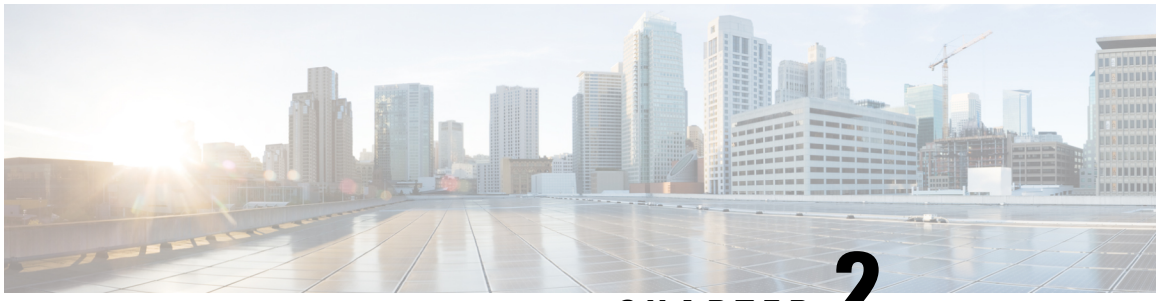

CHAPTER 2

Class-Based Policing

Class-based policing allows you to control the maximum rate of traffic that is transmitted or received on an interface. Class-based policing is often configured on interfaces at the edge of a network to limit traffic into or out of the network.

- Information About Class-Based Policing, on page 3
- Restrictions for Class-Based Policing, on page 4
- How to Configure Class-Based Policing, on page 4
- Configuration Examples for Class-Based Policing, on page 9
- Additional References, on page 11

Information About Class-Based Policing

Class-Based Policing Functionality

The Class-Based Policing feature performs the following functions:

- Limits the input transmission rate of a class of traffic based on user-defined criteria.

Class-based policing allows you to control the maximum rate of traffic transmitted or received on an interface. The Class-Based Policing feature is applied when you attach a traffic policy that contains the class-based policing configuration to an interface.

The Class-Based Policing feature works with a token bucket mechanism. There are currently two types of token bucket algorithms: a single token bucket algorithm and a two-token bucket algorithm. A single token bucket system is used when the **violate-action** option is not specified, and a two-token bucket system is used when the **violate-action** option is specified.

Benefits of Class-Based Policing

Bandwidth Management Through Rate Limiting

Class-based policing allows you to control the maximum rate of traffic transmitted or received on an interface. Class-based policing is often configured on interfaces at the edge of a network to limit traffic into or out of the network. In most class-based policing configurations, traffic that falls within the rate parameters is transmitted, whereas traffic that exceeds the parameters is dropped or transmitted with a different priority.

Packet Marking

Packet marking allows you to partition your network into multiple priority levels or classes of service (CoS). A packet is marked and these markings can be used to identify and classify traffic for downstream devices.

- Use class-based policing to set the IP precedence or DSCP values for packets entering the network. Networking devices within your network can then use the adjusted IP precedence values to determine how the traffic should be treated.
- Use class-based policing to assign packets to a QoS group. The router uses the QoS group to determine how to prioritize packets.

Traffic can be marked without using the Class-Based Policing feature.

Restrictions for Class-Based Policing

- Class-based policing on sub-interfaces is *not* supported.
- Policing is supported for ingress policy maps only.
- Hierarchical policing (policing at both parent level and child level) is *not* supported. However, Egress two-level policer is supported provided PHB level priority policer is configured.
- Conditional marking is *not* supported.

How to Configure Class-Based Policing

Configuring a Traffic Policing Service Policy

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **class-map** [**match-all** | **match-any**] *class-map-name*
4. **match ip precedence** *precedence-value*
5. **exit**
6. **policy-map** *policy-map-name*
7. **class** {*class-name* | **class-default**}
8. **police** *bps burst-normal burst-max* **conform-action** *action* **exceed-action** *action* **violate-action** *action*
9. **exit**
10. **exit**
11. **interface** *interface-type interface-number*
12. **service-policy** {**input** | **output**} *policy-map-name*
13. **end**

DETAILED STEPS

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Router> enable`	Enables higher privilege levels, such as privileged EXEC mode. • Enter your password if prompted.
Step 2	**configure terminal** **Example:** `Router# configure terminal`	Enters global configuration mode.
Step 3	**class-map** [**match-all** | **match-any**] *class-map-name* **Example:** `Router(config)# class-map match-any MATCH_PREC`	Specifies the name of the class map to be created and enters QoS class map configuration mode. • The class map defines the criteria to use to differentiate the traffic. For example, you can use the class map to differentiate voice traffic from data traffic, based on a series of match criteria defined using the **match** command. **Note** If the **match-all** or **match-any** keyword is not specified, traffic must match all the match criteria to be classified as part of the traffic class.
Step 4	**match ip precedence** *precedence-value* **Example:** `Router(config-cmap)# match ip precedence 0`	Enables packet matching on the basis of the IP precedence values you specify. **Note** You can enter up to four matching criteria, as number abbreviation (0 to 7) or criteria names (critical, flash, and so on), in a single match statement.
Step 5	**exit** **Example:** `Router(config-cmap)# exit`	Returns to global configuration mode.
Step 6	**policy-map** *policy-map-name* **Example:** `Router(config)# policy-map POLICE-SETTING`	Creates or modifies a policy map that can be attached to one or more interfaces to specify a service policy, and enters QoS policy-map configuration mode.
Step 7	**class** {*class-name* | **class-default**} **Example:**	Specifies the name of the class whose policy you want to create or change or specifies the default class (commonly

	Command or Action	Purpose
	`Router(config-pmap)# class MATCH_PREC`	known as the class-default class) before you configure its policy, and enters policy-map class configuration mode.
Step 8	**police** *bps burst-normal burst-max* **conform-action** *action* **exceed-action** *action* **violate-action** *action* **Example:** `Router(config-pmap-c)# police 8000 1000 1000 conform-action transmit exceed-action set-qos-transmit 1 violate-action drop`	Configures traffic policing according to burst sizes and any optional actions specified. **Note** Conditional marking is *not* supported on the Cisco RSP3 Module.
Step 9	**exit** **Example:** `Router(config-pmap-c)# exit`	(Optional) Exits policy-map class configuration mode.
Step 10	**exit** **Example:** `Router(config-pmap)# exit`	(Optional) Exits QoS policy-map configuration mode.
Step 11	**interface** *interface-type interface-number* **Example:** `Router(config)# interface GigabitEthernet 0/0/1`	Configures an interface type and enters interface configuration mode. • Enter the interface type and interface number.
Step 12	**service-policy** {**input** | **output**} *policy-map-name* **Example:** `Router(config-if)# service-policy input POLICE-SETTING`	Attaches a policy map to an interface. • Enter either the **input** or **output** keyword and the policy map name.
Step 13	**end** **Example:** `Router(config-if)# end`	(Optional) Exits interface configuration mode and returns to privileged EXEC mode.

Monitoring and Maintaining Traffic Policing

SUMMARY STEPS

1. **enable**
2. **show policy-map**
3. **show policy-map** *policy-map-name*
4. **show policy-map interface**

DETAILED STEPS

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Router> enable`	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	**show policy-map** **Example:** `Router# show policy-map`	Displays all configured policy maps.
Step 3	**show policy-map** *policy-map-name* **Example:** `Router# show policy-map pmap`	Displays the user-specified policy map.
Step 4	**show policy-map interface** **Example:** `Router# show policy-map interface`	Verifies that the Class-Based Policing feature is configured on your interface. If the feature is configured on your interface. • The command output displays policing statistics.

Verifying Class-Based Traffic Policing

Use the **show policy-map interface** command to verify that the Class-Based Policing feature is configured on your interface. If the feature is configured on your interface, the **show policy-map interface** command output displays policing statistics.

SUMMARY STEPS

1. **enable**
2. **show policy-map interface**
3. **show policy-map interface** *type interface*
4. **show policy-map interface** *type interface* **service instance** *service-instance number*
5. **exit**

DETAILED STEPS

Procedure

	Command or Action	Purpose
Step 1	**enable**	Enables privileged EXEC mode.

	Command or Action	Purpose
	Example: `Router> enable`	• Enter your password if prompted.
Step 2	**show policy-map interface** **Example:** `Router# show policy-map interface`	Verifies that the Class-Based Policing feature is configured on your interface. If the feature is configured on your interface. • The command output displays policing statistics.
Step 3	**show policy-map interface** *type interface* **Example:** `Router# show policy-map interface GigabitEthernet 0/0/1`	Displays traffic statistics for policies applied to a specific interface.
Step 4	**show policy-map interface** *type interface* **service instance** *service-instance number* **Example:** `Router# show policy-map interface GigabitEthernet 0/0/1 service instance 1`	Displays the policy map information for a given service instance under an interface.
Step 5	**exit** **Example:** `Router# exit`	(Optional) Exits privileged EXEC mode.

Example: Verifying Class-Based Traffic Policing

```
Router# show policy-map interface
  FastEthernet1/1/1
  service-policy output: x
    class-map: a (match-all)
      0 packets, 0 bytes
      5 minute rate 0 bps
      match: ip precedence 0
      police:
        1000000 bps, 10000 limit, 10000 extended limit
        conformed 0 packets, 0 bytes; action: transmit
        exceeded 0 packets, 0 bytes; action: drop
        conformed 0 bps, exceed 0 bps, violate 0 bps
```

Troubleshooting Tips

Check the interface type. Verify that class-based policing is supported on your interface.

Configuration Examples for Class-Based Policing

Example Configuring a Service Policy That Includes Traffic Policing

In the following example, class-based policing is configured with the average rate at 8000 bits per second, the normal burst size at 1000 bytes, and the excess burst size at 1000 bytes for all packets leaving the interface.

```
class-map access-match
 match access-group 1
 exit
policy-map police-setting
 class access-match
  police 8000 1000 1000 conform-action transmit exceed-action set-qos-transmit 1
violate-action drop
  exit
 exit
 service-policy output police-setting
```

The treatment of a series of packets leaving FastEthernet interface 1/1/1 depends on the size of the packet and the number of bytes remaining in the conform and exceed token buckets. The series of packets are policed based on the following rules:

- If the previous arrival of the packet was at T1 and the current arrival of the packet is at T, the bucket is updated with T - T1 worth of bits based on the token arrival rate. The refill tokens are placed in the conform bucket. If the tokens overflow the conform bucket, the overflow tokens are placed in the exceed bucket. The token arrival rate is calculated as follows:

(time between packets < which is equal to T - T1 > * policer rate)/8 bytes

- If the number of bytes in the conform bucket is greater than the length of the packet (for example, B), then the packet conforms and B bytes should be removed from the bucket. If the packet conforms, B bytes are removed from the conform bucket and the conform action is taken. The exceed bucket is unaffected in this scenario.
- If the number of bytes in the conform bucket is less than the length of the packet, but the number of bytes in the exceed bucket is greater than the length of the packet (for example, B), the packet exceeds and B bytes are removed from the bucket.
- If the number bytes in the exceed bucket B is fewer than 0, the packet violates the rate and the violate action is taken. The action is complete for the packet.

In this example, the initial token buckets starts full at 1000 bytes. If a 450-byte packet arrives, the packet conforms because enough bytes are available in the conform token bucket. The conform action (send) is taken by the packet, and 450 bytes are removed from the conform token bucket (leaving 550 bytes).

If the next packet arrives 0.25 seconds later, 250 bytes are added to the conform token bucket ((0.25 * 8000)/8), leaving 800 bytes in the conform token bucket. If the next packet is 900 bytes, the packet does not conform because only 800 bytes are available in the conform token bucket.

The exceed token bucket, which starts full at 1000 bytes (as specified by the excess burst size, is then checked for available bytes. Because enough bytes are available in the exceed token bucket, the exceed action (set the QoS transmit value of 1) is taken, and 900 bytes are taken from the exceed bucket (leaving 100 bytes in the exceed token bucket).

If the next packet arrives 0.40 seconds later, 400 bytes are added to the token buckets ((.40 * 8000)/8). Therefore, the conform token bucket now has 1000 bytes (the maximum number of tokens available in the conform bucket, and 200 bytes overflow the conform token bucket (because only 200 bytes were needed to fill the conform token bucket to capacity). These overflow bytes are placed in the exceed token bucket, giving the exceed token bucket 300 bytes.

If the arriving packet is 1000 bytes, the packet conforms because enough bytes are available in the conform token bucket. The conform action (transmit) is taken by the packet, and 1000 bytes are removed from the conform token bucket (leaving 0 bytes).

If the next packet arrives 0.20 seconds later, 200 bytes are added to the token bucket ((.20 * 8000)/8). Therefore, the conform bucket now has 200 bytes. If the arriving packet is 400 bytes, the packet does not conform because only 200 bytes are available in the conform bucket. Similarly, the packet does not exceed because only 300 bytes are available in the exceed bucket. Therefore, the packet violates and the violate action (drop) is taken.

Verifying Class-Based Traffic Policing

Use the **show policy-map interface** command to verify that the Class-Based Policing feature is configured on your interface. If the feature is configured on your interface, the **show policy-map interface** command output displays policing statistics:

```
Router# show policy-map interface
  FastEthernet1/1/1
  service-policy output: x
    class-map: a (match-all)
      0 packets, 0 bytes
      5 minute rate 0 bps
      match: ip precedence 0
      police:
        1000000 bps, 10000 limit, 10000 extended limit
        conformed 0 packets, 0 bytes; action: transmit
        exceeded 0 packets, 0 bytes; action: drop
        conformed 0 bps, exceed 0 bps, violate 0 bps
```

Use the **show policy-map interface** *type nummber* command to view the traffic statistics for policies applied to that specific interface:

```
Router# show policy-map interface gigabitethernet 0/0/1
 GigabitEthernet0/0/1

  Service-policy input: TUNNEL_MARKING

    Class-map: MATCH_PREC (match-any)
      72417 packets, 25418367 bytes
      5 minute offered rate 0000 bps, drop rate 0000 bps
      Match: ip precedence 0
      QoS Set
        ip precedence tunnel 3
          Marker statistics: Disabled

    Class-map: MATCH_DSCP (match-any)
      0 packets, 0 bytes
      5 minute offered rate 0000 bps, drop rate 0000 bps
      Match: ip dscp default (0)
      QoS Set
        ip dscp tunnel 3
          Marker statistics: Disabled
```

```
    Class-map: class-default (match-any)
      346462 packets, 28014400 bytes
      5 minute offered rate 0000 bps, drop rate 0000 bps
      Match: any

  Service-policy output: POLICE-SETTING

    Class-map: MATCH_PREC (match-any)
      0 packets, 0 bytes
      5 minute offered rate 0000 bps, drop rate 0000 bps
      Match: ip precedence 0
      police:
          cir 8000 bps, bc 1000 bytes, be 1000 bytes
        conformed 0 packets, 0 bytes; actions:
          transmit
        exceeded 0 packets, 0 bytes; actions:
          set-qos-transmit 1
        violated 0 packets, 0 bytes; actions:
          drop
        conformed 0000 bps, exceed 0000 bps, violate 0000 bps

    Class-map: class-default (match-any)
      31 packets, 2019 bytes
      5 minute offered rate 0000 bps, drop rate 0000 bps
      Match: any
```

Use the **show policy-map interface service instance** command to view the traffic statistics for policy applied to the specific service instance in that specific interface:

```
Router# show policy-map interface gig0/0/1 service instance 10
 GigabitEthernet0/0/1: EFP 10

       Service-policy input: ac1

 Class-map: ac1 (match-all)
   0 packets, 0 bytes
   5 minute offered rate 0000 bps, drop rate 0000 bps
   Match: access-group 1
   police:
       cir 50000000 bps, bc 1562500 bytes
     conformed 0 packets, 0 bytes; actions:
       transmit
     exceeded 0 packets, 0 bytes; actions:
       drop
     conformed 0000 bps, exceeded 0000 bps

 Class-map: class-default (match-any)
   0 packets, 0 bytes
   5 minute offered rate 0000 bps, drop rate 0000 bps
   Match: any
```

Additional References

Related Documents

Related Topic	Document Title
QoS commands: complete command syntax, command modes, command history, defaults, usage guidelines, and examples	*Cisco IOS Quality of Service Solutions Command Reference*

Related Topic	Document Title
Traffic marking	"Marking Network Traffic" module
Traffic policing	"Traffic Policing" module
Traffic policing and shaping concepts and overview information	"Policing and Shaping Overview"
Modular Quality of Service Command-Line Interface (MQC)	"Applying QoS Features Using the MQC" module

Standards

Standard	Title
None	--

MIBs


MIB	MIBs Link
Class-Based Quality of Service MIB • CISCO-CLASS-BASED-QOS-MIB • CISCO-CLASS-BASED-QOS-CAPABILITY-MIB	To locate and download MIBs for selected platforms, Cisco IOS XE Software releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
RFC 2697	*A Single Rate Three Color Marker*

Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	http://www.cisco.com/cisco/web/support/index.html

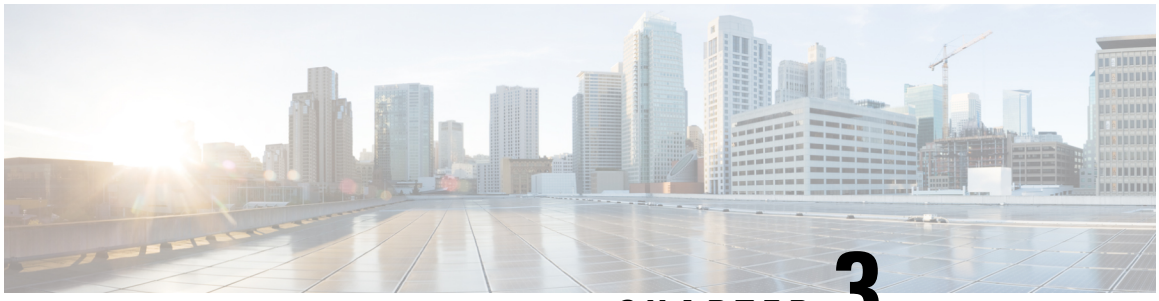

CHAPTER 3

Port-Shaper and LLQ in the Presence of EFPs

The Port-Shaper and LLQ in the Presence of EFPs feature allows network designers to configure port and class policies on ports that contain Ethernet Flow Points (EFPs). These policies support Low Latency Queueing (LLQ) and traffic prioritization across the EFPs.

- Restrictions for Port-Shaper and LLQ in the Presence of EFPs, on page 13
- Information About Port-Shaper and LLQ in the Presence of EFPs, on page 14
- How to Configure Port-Shaper and LLQ in the Presence of EFPs, on page 14
- Configuration Examples for Port-Shaper and LLQ in the Presence of EFPs, on page 23
- Additional References, on page 24

Restrictions for Port-Shaper and LLQ in the Presence of EFPs

- If you configure port level shaper with the policy applied at EFP level then port shaper does not work. However, 3 level HQoS policy with port and logical shaper can be applied at the EFP level. Logical shaper configured at logical level does work but port shaper does not work.
- If you configure a class-based HQOS or LLQ policy on the port, you cannot configure service-policies on Ethernet Flow Points (EFPs). The only exception to this is the class-default shaper policy and match EFP policy.
- If you configure a class-based policy on the port, you cannot configure service-policies on EFPs.
- If you configure a class-default port-shaper based policy on the port, you can configure service-policy on EFPs.
- Usage of bandwidth remaining percentage (BRP) in the absence of priority class, allocates the available bandwidth in an iterative way. For example, the bandwidth is allocated for the first BRP class as per the percentage of share configured in the respective class-map and the remaining bandwidth is iteratively allocated to all other BRP classes until the bandwidth is exhausted.

Information About Port-Shaper and LLQ in the Presence of EFPs

Ethernet Flow Points and LLQ

An Ethernet Flow Point (EFP) is a forwarding decision point in the provider edge (PE) router, which gives network designers flexibility to make many Layer 2 flow decisions within the interface. Many EFPs can be configured on a single physical port. (The number varies from one device to another.) EFPs are the logical demarcation points of an Ethernet virtual connection (EVC) on an interface. An EVC that uses two or more User-Network Interfaces (UNIs) requires an EFP on the associated ingress and egress interfaces of every device that the EVC passes through.

The Egress HQoS with Port Level Shaping feature allows network designers to configure port and class policies on ports that contain EFPs. These policies support Low Latency Queueing (LLQ) and traffic prioritization across the EFPs.

For information on how to configure LLQ, see the *QoS Congestion Management Configuration Guide*.

How to Configure Port-Shaper and LLQ in the Presence of EFPs

To configure the Port-Shaper and LLQ in the Presence of EFPs feature, you first create either a hierarchical or flat policy map that supports Low Latency Queueing (LLQ), which you then attach to an EFP interface.

Configuring Hierarchical Policy Maps

To configure hierarchical policy maps, you create child policies which you then attach to a parent policy. The parent policy is then attached to an interface.

Procedure

Step 1 **enable**

Example:

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

Step 2 **configure terminal**

Example:

```
Device# configure terminal
```

Enters global configuration mode.

Step 3 **policy-map** *policy-map-name*

Example:

```
Device(config)# policy-map child-llq
```

Creates or modifies the child policy and enters QoS policy-map configuration mode.

- child-llq is the name of the child policy map.

Step 4 **class** *class-map-name*

Example:

```
Device(config-pmap)# class precedenc-1
```

Assigns the traffic class you specify to the policy map and enters QoS policy-map class configuration mode.

- precedenc-1 is the name of a previously configured class map and is the traffic class for which you want to define QoS actions.

Step 5 **set cos** *value*

Example:

```
Device(config-pmap-c)# set cos 5
```

(Optional) Sets the Layer 2 class of service (CoS) value of an outgoing packet.

- The value is a specific IEEE 802.1Q CoS value from 0 to 7.

Step 6 **bandwidth percent** *percent*

Example:

```
Device(config-pmap-c)# bandwidth percent 20
```

(Optional) Specifies a bandwidth percent for class-level queues to be used during congestion to determine the amount of excess bandwidth (unused by priority traffic) to allocate to nonpriority queues.

Step 7 **exit**

Example:

```
Device(config-pmap-c)# exit
```

Exits QoS policy-map class configuration mode.

Step 8 **class** *class-map-name*

Example:

```
Device(config-pmap)# class precedenc-2
```

Assigns the traffic class you specify to the policy map and enters QoS policy-map class configuration mode.

- precedenc-2 is the name of a previously configured class map and is the traffic class for which you want to define QoS actions.

Note
match on qos-group is supported on the Cisco RSP3 Module.

Step 9 **bandwidth percent** *percent*

Example:

```
Device(config-pmap-c)# bandwidth percent 80
```

(Optional) Specifies a bandwidth percent for class-level queues to be used during congestion to determine the amount of excess bandwidth (unused by priority traffic) to allocate to nonpriority queues.

Step 10 **exit**

Example:

```
Device(config-pmap-c)# exit
```

Exits QoS policy-map class configuration mode.

Step 11 **policy-map** *policy-map-name*

Example:

```
Device(config-pmap)# policy-map parent-llq
```

Creates or modifies the parent policy.

- parent-llq is the name of the parent policy map.

Step 12 **class** *class-default*

Example:

```
Device(config-pmap)# class class-default
```

Configures or modifies the parent class-default class and enters QoS policy-map class configuration mode.

- You can configure only the class-default class in a parent policy. Do not configure any other traffic class.

Step 13 **service-policy** *policy-map-name*

Example:

```
Device(config-pmap-c)# service-policy child-llq
```

Applies the child policy to the parent class-default class.

- child-llq is the name of the child policy map configured in step 1.

Configuring Class-default Port-Shaper Policy Maps

To configure hierarchical policy maps, first create the child policies and then attach it to a parent policy. The parent policy must be attached to an interface.

SUMMARY STEPS

1. **enable**

2. **configure terminal**
3. **policy-map** *policy-map-name*
4. **class** *class-default*
5. **shape-average** *shape-value*
6. **exit**

DETAILED STEPS

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**policy-map** *policy-map-name* **Example:** `Device(config)# policy-map child-llq`	Creates or modifies the child policy and enters QoS policy-map configuration mode. • child-llq is the name of the child policy map.
Step 4	**class** *class-default* **Example:** `Device(config-pmap)# class class-default`	Configures or modifies the parent class-default class and enters QoS policy-map class configuration mode. • You can configure only the class-default class in a parent policy. Do not configure any other traffic class.
Step 5	**shape-average** *shape-value* **Example:** `Device(config-pmap-c)#shape average 200000000`	Configures a shape entity with a Comitted Information Rate of 200 Mb/s.
Step 6	**exit** **Example:** `Device(config-pmap-c)# exit`	Exits QoS policy-map class configuration mode.

Configuring Port-Shaper Policy Maps

SUMMARY STEPS

1. **enable**

2. **configure terminal**
3. **policy-map** *policy-map-name*
4. **class** *class-default*
5. **shape-average** *shape-value*
6. **service-policy** *policy-map-name*

DETAILED STEPS

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**policy-map** *policy-map-name* **Example:** `Device(config)# policy-map def`	Creates or modifies the child policy and enters QoS policy-map configuration mode.
Step 4	**class** *class-default* **Example:** `Device(config-pmap)# class class-default`	Assigns the traffic class you specify to the policy map and enters QoS policy-map class configuration mode.
Step 5	**shape-average** *shape-value* **Example:** `Device(config-pmap-c)#shape average 200000000`	Configures a shape entity with a Comitted Information Rate of 200 Mb/s.
Step 6	**service-policy** *policy-map-name* **Example:** `Device(config-pmap-c)# service-policy child-llq`	Applies the child policy to the parent class-default class. • child-llq is the name of the child policy map configured in Configuring Class-default Port-Shaper Policy Maps, on page 16.

Configuring an LLQ Policy Map

Procedure

Step 1 **enable**

Example:

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

Step 2 **configure terminal**

Example:

```
Device# configure terminal
```

Enters global configuration mode.

Step 3 **policy-map** *policy-map-name*

Example:

```
Device(config)# policy-map llq-flat
```

Creates a policy and enters QoS policy-map configuration mode.

Step 4 **class** *class-map-name*

Example:

Assigns the traffic class you specify to the policy map and enters policy-map class configuration mode.

Step 5 **priority**

Example:

```
Device(config-pmap-c)# priority
```

Configures LLQ, providing strict priority queueing (PQ) for class-based weighted fair queueing (CBWFQ).

Step 6 **exit**

Example:

```
Device(config-pmap-c)# exit
```

Exits QoS policy-map class configuration mode.

Step 7 **class** *class-map-name*

Example:

Assigns the traffic class you specify to the policy map and enters QoS policy-map class configuration mode.

Step 8 **shape average** *value*

Example:

```
Device(config-pmap-c)# shape average 200000000
```

Configures a shape entity with a Comitted Information Rate of 200 Mb/s.

Step 9 **exit**

Example:

```
Device(config-pmap-c)# exit
```

Exits QoS policy-map class configuration mode.

Step 10 **class** *class-map-name*

Example:

Assigns the traffic class you specify to the policy map and enters QoS policy-map class configuration mode.

Step 11 **bandwidth** *percent*

Example:

```
Device(config-pmap-c)# bandwidth 4000000
```

(Optional) Specifies a bandwidth percent for class-level queues to be used during congestion to determine the amount of excess bandwidth (unused by priority traffic) to allocate to non-priority queues.

Step 12 **exit**

Example:

```
Device(config-pmap-c)# exit
```

Exits QoS policy-map class configuration mode.

Configuring Port Level Shaping on the Main Interface with Ethernet Flow Points

To configure port level shaping on the main interface with EFPS, first you enable the autonegotiation protocol on the interface, then you attach a policy map to the interface and finally you configure the Ethernet service instance.

Procedure

Step 1 **enable**

Example:

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

Step 2 **configure terminal**

Example:

```
Device# configure terminal
```

Enters global configuration mode.

Step 3 **interface** *type number*

Example:

```
Device(config)# interface GigabitEthernet 0/0/1
```

Configures an interface type and enters interface configuration mode.

- Enter the interface type number.

Step 4 **no ip address**

Example:

```
Device(config-if)# no ip address
```

Disables IP routing on the interface.

Step 5 **negotiation auto**

Example:

```
Device(config-if)# negotiation auto
```

Enables the autonegotiation protocol to configure the speed, duplex, and automatic flow control of the Gigabit Ethernet interface.

Step 6 **service-policy output** *policy-map-name*

Example:

```
Device(config-if)# service-policy output parent-llq
```

Specifies the name of the policy map to be attached to the input or output direction of the interface.

- You can enter the name of a hierarchical or a flat policy map.

Step 7 **service instance** *id* **ethernet**

Example:

```
Device(config-if)# service instance 1 ethernet
```

Configures an Ethernet service instance on an interface and enters service instance configuration mode.

Step 8 **encapsulation dot1q** *vlan-id*

Example:

```
Device(config-if-srv)# encapsulation dot1q 100
```

Defines the matching criteria to map 802.1Q frames' ingress on an interface to the service instance.

Step 9 **bridge-domain** *bridge-domain-id*

Example:

```
Device(config-if-srv)# bridge-domain 100
```

Binds the bridge domain to the service instance.

Step 10 **exit**

Example:

```
Device(config-if-serv)# exit
```

Exits service instance configuration mode.

Step 11 **service instance** *id* **ethernet**

Example:

```
Device(config-if)# service instance 2 ethernet
```

Configures an Ethernet service instance on an interface and enters service instance configuration mode.

Step 12 **encapsulation dot1q** *vlan-id*

Example:

```
Device(config-if-srv)# encapsulation dot1q 101
```

Defines the matching criteria to map 802.1Q frames' ingress on an interface to the service instance.

Step 13 **bridge-domain** *bridge-domain-id*

Example:

```
Device(config-if-srv)# bridge-domain 101
```

Binds the bridge domain to the service instance.

Step 14 **exit**

Example:

```
Device(config-if-srv)# exit
```

Exits QoS policy-map class configuration mode.

Step 15 **end**

Example:

```
Device(config-if)# end
```

(Optional) Exits interface configuration mode.

Configuration Examples for Port-Shaper and LLQ in the Presence of EFPs

Example: Configuring Hierarchical QoS Port Level Shaping on the Main Interface with EFPs

The following example shows how to configure hierarchical QoS port level shaping on a main physical interface to support traffic prioritization and Low Level Queueing across all EFPs configured on the interface:

```
policy-map parent-llq
 class class-default
   service-policy child-llq

policy-map child-llq
 class precedenc-1
  set cos 5
  bandwidth percent 20
 class precedenc-2
  bandwidth percent 80

interface GigabitEthernet 0/0/1
 no ip address
 negotiation auto
 service-policy output parent-llq
 service instance 1 ethernet
  encapsulation dot1q 100
  bridge-domain 100
 !
 service instance 2 ethernet
  encapsulation dot1q 101
  bridge-domain 101
```

Note Only match EFP and match qos-group is supported on RSP3 in egress policy map.

Configuration Example: Class-default Port-Shaper and EFP policy

The following example shows how to configure class-default port-shaper and EFP policy, where the main interface can have the class-default shaper policy and EFP can have the HQOS policies.

```
policy-map co12
```

```
class class-default
shape average 50m


policy-map def
 class class-default
shape average 500m
service-policy co12
```

Example: Configuring Port Level Shaping on the Main Interface with EFPs

The following example shows how to configure port level shaping on a main physical interface to support traffic prioritization and Low Level Queueing across all Ethernet Flow Points (EFPs) configured on the interface:

```
policy-map llq_flat
 class dscp-af1
  priority
  class dscp-af2
   shape average 200000000
  class dscp-af3
   bandwidth 400000

interface GigabitEthernet 0/0/1
 no ip address
 negotiation auto
 service-policy output llq_flat
 service instance 1 ethernet
  encapsulation dot1q 100
  bridge-domain 100
 !
 service instance 2 ethernet
  encapsulation dot1q 101
  bridge-domain 101
```

Additional References

Related Documents

Related Topic	Document Title
Cisco IOS commands	*Cisco IOS Master Commands List, All Releases*
QoS commands: complete command syntax, command modes, command history, defaults, usage guidelines, and examples	*Cisco IOS QoS Command Reference*
Policing and shaping	"Policing and Shaping Overview" module
Class maps	"Applying QoS Features Using the MQC" module
Policy maps	"Applying QoS Features Using the MQC" module

Related Topic	Document Title
Low Latency Queueing	*QoS Congestion Management Configuration Guide*

Standards and RFCs


Standard	Title
No new or modified standards are supported, and support for existing standards has not been modified.	--

MIBs

MIB	MIBs Link
No new or modified MIBs are supported, and support for existing MIBs has not been modified.	To locate and download MIBs for selected platforms, Cisco IOS XE software releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	http://www.cisco.com/cisco/web/support/index.html

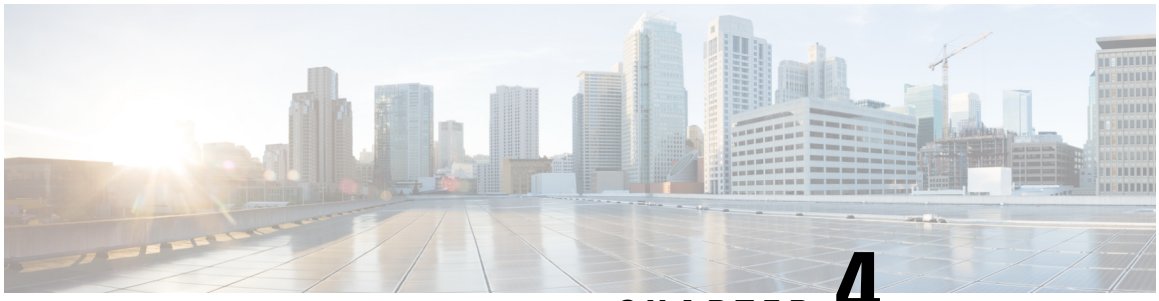

CHAPTER 4

Control Plane Policing

The Control Plane Policing feature allows you to configure a quality of service (QoS) filter that manages the traffic flow of control plane packets to protect the control plane of routers and switches against reconnaissance and denial-of-service (DoS) attacks. In this way, the control plane (CP) can help maintain packet forwarding and protocol states despite an attack or heavy traffic load on the router or switch.

- Information About Control Plane Policing, on page 27
- Restrictions for Control Plane Policing, on page 32
- Restrictions for CoPP on the RSP3, on page 32
- IP Access List Overview, on page 33
- IP Address Range-Based Filtering Support for CoPP ACL, on page 35
- How to Use Control Plane Policing, on page 35
- Configuring CoPP ACL Template, on page 40
- Configuration Examples for Control Plane Policing, on page 42
- Verification Examples for CoPP, on page 43
- Additional References, on page 44

Information About Control Plane Policing

Control Plane Policing Overview

To protect the control plane on a router from DoS attacks and to provide fine-control over the traffic to the control plane, the Control Plane Policing feature treats the control plane as a separate entity with its own interface for ingress (input) and egress (output) traffic. This interface is called the punt or inject interface, and it is similar to a physical interface on the router. Along this interface, packets are punted from the forwarding plane to the RP (in the input direction) and injected from the RP to the forwarding plane (in the output direction). A set of quality of service (QoS) rules can be applied on this interface (in the input direction) in order to achieve CoPP.


These QoS rules are applied only after the packet has been determined to have the control plane as its destination. You can configure a service policy (QoS policy map) to prevent unwanted packets from progressing after a specified rate limit has been reached; for example, a system administrator can limit all TCP/TELNET packets that are destined for the control plane.

You can use the **platform qos-feature copp-mpls enable** command to enable the Control Plane Policing feature on the device for MPLS explicit null scenario, control packets destined to the device is punted to

proper control CPU Q. If CoPP-MPLS remains disabled, then self destined control packets like BGP, LDP, telnet and so on, that are MPLS explicit null tagged are not classified by CoPP and is punted to HOST_Q instead of CFM_Q/CONTROL_Q.

Note The command **platform qos-feature copp-mpls enable** is supported only on Cisco NCS 4200 platform.

Figure 1: Abstract Illustration of a Router with a Single RP and Forwarding Plane

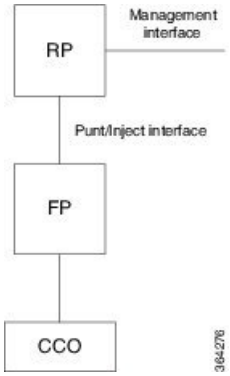

The figure provides an abstract illustration of the router with a single RP and forwarding plane. Packets that are destined to the control plane come in through the carrier card and then go through the forwarding plane before being punted to the RP. When an input QoS policy map is configured on the control plane, the forwarding plane performs the QoS action (for example, a transmit or drop action) before punting packets to the RP in order to achieve the best protection of the control plane in the RP.

Note The figure is not applicable to the RSP3 module.

Note As mentioned in this section, the control plane interface is directly connected to the RP, so all traffic through the control plane interface to or from the control-plane is not subject to the CoPP function performed by the forwarding plane.

Benefits of Control Plane Policing

Configuring the Control Plane Policing feature on your Cisco router or switch provides the following benefits:

- Protection against DoS attacks at infrastructure routers and switches
- QoS control for packets that are destined to the control plane of Cisco routers or switches
- Ease of configuration for control plane policies
- Better platform reliability and availability

Control Plane Terms to Understand

On the router, the following terms are used for the Control Plane Policing feature:

- Control plane—A collection of processes that run at the process level on the Route Processor (RP). These processes collectively provide high-level control for most Cisco IOS XE functions. The traffic sent to or sent by the control plane is called control traffic.
- Forwarding plane—A device that is responsible for high-speed forwarding of IP packets. Its logic is kept simple so that it can be implemented by hardware to do fast packet-forwarding. It punts packets that require complex processing (for example, packets with IP options) to the RP for the control plane to process them.

Supported Protocols

The following table lists the protocols supported on Control Plane Policing feature. It is mandatory that the IP address should match the source or destination IP address.

Table 1: Supported Protocols

Supported Protocols	Criteria	Match	Queue#
TFTP - Trivial FTP	Port Match	IP access list ext copp-system-acl-tftp permit udp any any eq 69	NQ_CPU_HOST_Q
TELNET	Port Match	IP access list ext copp-system-acl-telnet permit tcp any any eq telnet	NQ_CPU_CONTROL_Q
NTP - Network Time Protocol	Port Match	IP access list ext copp-system-acl-ntp permit udp any any eq ntp	NQ_CPU_HOST_Q
FTP - File Transfer Protocol	Port Match	IP access list ext copp-system-acl-ftp permit tcp host any any eq ftp	NQ_CPU_HOST_Q
SNMP - Simple Network Management Protocol	Port Match	IP access list ext copp-system-acl-snmp permit udp any any eq snmp	NQ_CPU_HOST_Q
TACACS - Terminal Access Controller Access-Control System	Port Match	IP access list ext copp-system-acl-tacacs permit tcp any any tacacs	NQ_CPU_HOST_Q

Supported Protocols	Criteria	Match	Queue#
FTP-DATA	Port Match	IP access list ext copp-system-acl-ftpdata permit tcp any any eq 20	NQ_CPU_HOST_Q
HTTP - Hypertext Transfer Protocol	Port Match	IP access list ext copp-system-acl-http permit tcp any any eq www	NQ_CPU_HOST_Q
WCCP - Web Cache Communication Protocol	Port Match	IP access list ext copp-system-acl-wccp permit udp any eq 2048 any eq 2048	NQ_CPU_HOST_Q
SSH - Secure Shell	Port Match	IP access list ext copp-system-acl-ssh permit tcp any any eq 22	NQ_CPU_HOST_Q
ICMP - Internet Control Message Protocol	Protocol Match	IP access list copp-system-acl-icmp permit icmp any any	NQ_CPU_HOST_Q
DHCP - Dynamic Host Configuration Protocol	Port Match	IP access list copp-system-acl-dhcp permit udp any any eq bootps	NQ_CPU_HOST_Q
MPLS- OAM	Port Match	IP access list copp-system-acl-mplsoam permit udp any eq 3503 any	NQ_CPU_HOST_Q
LDP - Label Distribution Protocol	Port Match	IP access list copp-system-acl-ldp permit udp any eq 646 any eq 646 permit tcp any any eq 646	NQ_CPU_CFM_Q

Supported Protocols	Criteria	Match	Queue#
RADIUS - Remote Authentication Dial In User Service	Port Match	IP access list copp-system-radius permit udp any any eq 1812 permit udp any any eq 1813 permit udp any any eq 1645 permit udp any any eq 1646 permit udp any eq 1812 any permit udp any eq 1813 any permit udp any eq 1645 any	NQ_CPU_HOST_Q
Network Configuration Protocol (NETCONF)	IP/Port Match	IP access list ext copp-system-acl-telnet permit tcp any any eq 830 - NETCONF	NQ_CPU_HOST_Q
PostgreSQL Support	IP/Port Match	IP access list ext copp-system-acl-telnet PostgreSQL IP/Port Match permit tcp 169.223.252.0.0 0.0.3.255 host 169.223.253.1 eq 5432	NQ_CPU_HOST_Q
Source IP or Destination IP	IP/Port Match	Permit IP host 10.1.1.1 or 10.1.1.2 **Note** The **permit ip any any** command is not supported.	NQ_CPU_HOST_Q

Input Rate-Limiting and Silent Mode Operation

A router is automatically enabled to silently discard packets when you configure input policing on control plane traffic using the **service-policy input** *policy-map-name* command.

Rate-limiting (policing) of input traffic from the control plane is performed in silent mode. In silent mode, a router that is running Cisco IOS XE software operates without receiving any system messages. If a packet that is entering the control plane is discarded for input policing, you do not receive an error message.

Restrictions for Control Plane Policing

Input Rate-Limiting Support

Input rate-limiting is performed in silent (packet discard) mode. Silent mode enables a router to silently discard packets using policy maps applied to input control plane traffic with the **service-policy input** command. For more information, see the “Input Rate-Limiting and Silent Mode Operation” section.

MQC Restrictions

The Control Plane Policing feature requires the Modular QoS CLI (MQC) to configure packet classification and traffic policing. All restrictions that apply when you use the MQC to configure traffic policing also apply when you configure control plane policing.

Match Criteria Support

Only the extended IP access control lists (ACLs) classification (match) criteria is supported.

Restrictions for CoPP

- IPv6 is not supported.
- Port range ACL is not supported.
- Due to hardware limitation, to match the control plane packets against CoPP, ACL rules that match with IP addresses should be added, since adding generic ACL rules with any any matches both the data plane and control plane traffic.
- On RSP2, when CoPP is configured with ACL rules, the decision to forward or punt packets is determined by the forwarding engine, rather than the ACL engine. This is due to a known hardware limitation, where packets processed by the ACL engine cannot differentiate between control packets and data packets.

Restrictions for CoPP on the RSP3

- CoPP does not support multi match. ACLs with DSCP and fragment option enabled does not filter or classify packets under CoPP.
- Effective Cisco IOS XE Bengaluru 17.5.1 **`enable_copp_copp`** and **`enable_acl`** template must be configured on the RSP3 module to activate CoPP.
- Ingress and Egress marking are not supported.
- Egress CoPP is not supported. CoPP with marking is not supported.
- CPU bound traffic (punted traffic) flows is supported via the same queue with or without CoPP.
- Only match on access group is supported on a CoPP policy.

- Hierarchical policy is not supported with CoPP.
- Class-default is not supported on CoPP policy.
- User-defined ACLs are not subjected to CoPP classified traffic.
- A CoPP policy map applied on a physical interface is functional.
- When CoPP template is enabled, classification on outer VLAN, inner VLAN, Inner VLAN Cos, destination MAC address, source IP address, and destination IP address are not supported.

  The template-based model is used to enable CoPP features and disable some of the above mentioned QoS classifications.
- When **`enable_acl_copp`** template is enabled, **`sdm prefer enable_match_inner_dscp`** template is not supported.
- Only IP ACLs based class-maps are supported. MAC ACLs are not supported.
- Multicast protocols like PIM and IGMP are not supported.
- Only CPU destined Unicast Layer3 protocols packets are matched as part of CoPP classification.
- Do not configure CoPP and BDI-MTU SDM templates together, as it is not supported.
- Management packets cannot be filtered based on source TCP/UDP Ports and destination IP address.
- Ensure to enable the CoPP Version 2 template to enable the CoPP feature.
- Two ACL entries will be added for IPV4 and L3VPN cases for each ACL entry in the configuration.

Restrictions on Firmware

- Port ranges are not supported.
- Only exact matches are supported, greater than, less than and not equal are not supported.
- Internet Control Message Protocol (ICMP) inner type's classification not supported.
- Match any is only supported at a class-map level.
- Policing action is supported on a CoPP policy map.

IP Access List Overview

Access control lists (ACLs) perform packet filtering to control which packets move through the network and where. Such control provides security by helping to limit network traffic, restrict the access of users and devices to the network, and prevent traffic from leaving a network. IP access lists can reduce the chance of spoofing and denial-of-service attacks and allow dynamic, temporary user access through a firewall.

IP access lists can also be used for purposes other than security, such as bandwidth control, restricting the content of routing updates, redistributing routes, triggering dial-on-demand (DDR) calls, limiting debug output, and identifying or classifying traffic for quality of service (QoS) features. This module provides an overview of IP access lists.

Benefits

Improved Traffic Flow

This feature improves the Turbo ACL processing process in PXF by more expediently removing older entries. As a result, more Turbo ACL processing can be done in the PXF processing path, thereby allowing more router traffic to be accelerated using the PXF processing path.

Configuration of Route Processor Memory Limits for ACL Processing

This feature allows users to set the amount of memory reserved for ACL processes (such as compilation, storage, and classification) in the RP path. Users who need more memory for ACL processes now have the ability to set aside additional memory resources in the RP path for ACL processes. Users who need more more memory for other processes in the RP path now can set aside less memory for ACL processes.

Benefits of IP Access Lists

Access control lists (ACLs) perform packet filtering to control the flow of packets through a network. Packet filtering can restrict the access of users and devices to a network, providing a measure of security. Access lists can save network resources by reducing traffic. The benefits of using access lists are as follows:

- Authenticate incoming rsh and rcp requests—Access lists can simplify the identification of local users, remote hosts, and remote users in an authentication database that is configured to control access to a device. The authentication database enables Cisco software to receive incoming remote shell (rsh) and remote copy (rcp) protocol requests.
- Block unwanted traffic or users—Access lists can filter incoming or outgoing packets on an interface, thereby controlling access to a network based on source addresses, destination addresses, or user authentication. You can also use access lists to determine the types of traffic that are forwarded or blocked at device interfaces. For example, you can use access lists to permit e-mail traffic to be routed through a network and to block all Telnet traffic from entering the network.
- Control access to vty—Access lists on an inbound vty (Telnet) can control who can access the lines to a device. Access lists on an outbound vty can control the destinations that the lines from a device can reach.
- Identify or classify traffic for QoS features—Access lists provide congestion avoidance by setting the IP precedence for Weighted Random Early Detection (WRED) and committed access rate (CAR). Access lists also provide congestion management for class-based weighted fair queueing (CBWFQ), priority queueing, and custom queueing.
- Limit debug command output—Access lists can limit debug output based on an IP address or a protocol.
- Provide bandwidth control—Access lists on a slow link can prevent excess traffic on a network.
- Provide NAT control—Access lists can control which addresses are translated by Network Address Translation (NAT).
- Reduce the chance of DoS attacks—Access lists reduce the chance of denial-of-service (DoS) attacks. Specify IP source addresses to control traffic from hosts, networks, or users from accessing your network. Configure the TCP Intercept feature to can prevent servers from being flooded with requests for connection.
- Restrict the content of routing updates—Access lists can control routing updates that are sent, received, or redistributed in networks.

- Trigger dial-on-demand calls—Access lists can enforce dial and disconnect criteria.

IP Address Range-Based Filtering Support for CoPP ACL

IP Access Control Lists are a set of rules that perform packet filtering to control the flow of packets through a network. Packet filtering provides security by the following features:

- Limiting the access of traffic into a network.
- Restricting user and device access to a network.
- Preventing traffic from leaving a network.
- Reduce the chance of spoofing and denial-of-service attacks.

Table 2: Feature History Table

Feature Name	Release Information	Description
IP Address Range-Based Filtering Support for CoPP ACL	Cisco IOS XE Bengaluru 17.5.1	This feature supports Ingress on In-band Management Loopback interface and Ingress on Data plane interface to block traffic using MPLS. CoPP ACL also enables you to configure the **830** and **5432** ports on the Cisco router. This is only applicable to NCS 4206 and NCS 4216 routers. Both, Source IP and Destination IP based filtering are supported on NCS 4206 and NCS 4216; however, only Source IP based filtering is supported on the NCS 4201 and NCS 4202 routers.

Prior to the Cisco IOS XE Bengaluru 17.5.1 release, IP address Range-Based Filtering for CoPP ACL was not supported. Effective Cisco IOS XE Bengaluru 17.5.1 this feature enables you to securely manage MPLS traffic by supporting the following requirements:

- Ingress on In-Band Management Loopback interface.
- Ingress on Data plane interface to block MGMT Traffic on MPLS.

How to Use Control Plane Policing

Defining Control Plane Services

Perform this task to define control plane services, such as packet rate control and silent packet discard for the RP.

Before you begin

Before you enter control-plane configuration mode to attach an existing QoS policy to the control plane, you must first create the policy using MQC to define a class map and policy map for control plane traffic.

- Platform-specific restrictions, if any, are checked when the service policy is applied to the control plane interface.
- Input policing does not provide any performance benefits. It simply controls the information that is entering the device.

Procedure

Step 1 **enable**

Example:

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

Step 2 **configure terminal**

Example:

```
Device# configure terminal
```

Enters global configuration mode.

Step 3 **control-plane**

Example:

```
Device(config)# control-plane
```

Enters control-plane configuration mode (which is a prerequisite for defining control plane services).

Step 4 **service-policy** [**input** |**output**] *policy-map-name*

Example:

```
Device(config-cp)# service-policy input control-plane-policy
```

Attaches a QoS service policy to the control plane.

- **input**—Applies the specified service policy to packets received on the control plane.
- *policy-map-name*—Name of a service policy map (created using the **policy-map** command) to be attached.

Step 5 **end**

Example:

```
Device(config-cp)# end
```

(Optional) Returns to privileged EXEC mode.

Verifying Control Plane Services

Procedure

Step 1 **enable**

Example:

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

Step 2 **show policy-map control-plane** [**all**] [**input** |**output** [**class** *class-name*]]

Example:

```
Device# show policy-map control-plane all
```

Displays information about the control plane.

- **all**—(Optional) Displays service policy information about all QoS policies used on the CP.
- **input**—(Optional) Displays statistics for the attached input policy.
- **class** *class-name*—(Optional) Specifies the name of the traffic class whose configuration and statistics are displayed.

Step 3 **exit**

Example:

```
Device# exit
```

(Optional) Exits privileged EXEC mode.

Examples

The following example shows that the policy map TEST is associated with the control plane.

```
Router# show policy-map control-plane
Control Plane

Service-policy input: copp-ftp

Class-map: copp-ftp (match-any)
2234 packets, 223400 bytes
5 minute offered rate 0000 bps, drop rate 0000 bps
Match: access-group name copp-ftp
police:
cir 10000000 bps, be 312500 bytes
conformed 2234 packets, 223400 bytes; actions:
transmit
exceeded 0 packets, 0 bytes; actions:
drop
conformed 0000 bps, exceeded 0000 bps
```

```
Class-map: class-default (match-any)
0 packets, 0 bytes
5 minute offered rate 0000 bps, drop rate 0000 bps
Match: any
```

Configuring Control Plane Policing to Mitigate Denial-of-Service Attacks

Apply control plane policing (CoPP) to ICMP packets to mitigate denial of service (DoS) attacks.

Procedure

Step 1 **enable**

Example:

```
Device> enable
```

Enables privileged EXEC mode.

Step 2 **configure terminal**

Example:

```
Device# configure terminal
```

Enters global configuration mode.

Step 3 **access-list** *access-list-number* **permit** *protocol* {**tcd | udp**} {**any | host** {*source-addr* | *name*}} **eq** *port number* {**any | host** {*source-addr* | *name*}} **eq** *port number*

Example:

```
Device(config)# access-list 111 permit udp any eq 1699 any eq 1698
```

Configures an access list for filtering frames by UDP protocol and matches only packets with a given port number.

Step 4 **class-map [match-any | match-all | type]** *class-map-name*

Example:

```
Device(config)# class-map match-any MyClassMap
```

Creates a class-map and enters QoS class-map configuration mode.

Step 5 **match access-group** [*access-list-index* | *access-group-name*]

Example:

```
Device(config-cmap)# match access-group 111
```

Specifies access groups to apply to an identity policy. The range of valid values is 1-2799.

Step 6 **exit**

Example:

```
Device(config-cmap)# exit
```

Exits QoS class-map configuration mode and returns to global configuration mode.

Step 7 **policy-map** *policy-map-name*

Example:

```
Device(config)# policy-map Policy1
```

Specifies a service policy and enters QoS policy-map configuration mode.

Step 8 **class** [*class-map-name* | *class-default*]

Example:

```
Device(config-pmap)# class MyClassMap
```

Enters QoS policy-map class configuration more

Step 9 **police** {*rate-bps* | **cir** {*cir-bps* | **percent** *percent*}} [**bc** *burst-bytes*] [**conform-action** | **exceed-action** | **violate-action**]*action*] [ ]

Example:

```
police cir 10000000 bc 8000 pir 12000000 be 8000 conform-action transmit exceed-action transmit
violate-action drop
```

Configure a traffic policer based on the traffic rate or committed information rate (CIR). By default, no policer is defined.

- *rate-bps*—Specifies average traffic rate in bits per second (b/s). The range is 64000 to 10000000000. Supply an optional postfix (K, M, G). Decimal point is allowed.
- **cir**—Specifies a committed information rate (CIR).
- *cir-bps*—Specifies a CIR in bits per second (b/s). The range is 64000 to 10000000000. Supply an optional postfix (K, M, G). Decimal point is allowed.
- **be** *burst-bytes*—(Optional) Specifies the conformed burst (be) or the number of acceptable burst bytes. The range is 8000 to 16000000.
- **conform-action** *action*— (Optional) Specifies action to take on packets that conform to the specified rate limit.
- **pir** *pir-bps*—(Optional) Specifies the peak information rate (PIR).

Note
cir percent *percent* option is not supported on the router.

Step 10 **exit**

Example:

```
Device(config-pmap-c-police)# exit
```

Exits policy-map class police configuration mode

Step 11 **exit**

Example:

```
Device(config-pmap-c)# exit
```

Exits policy-map class configuration mode

Step 12 **exit**

Example:

```
Device(config-pmap)# exit
```

Exits policy-map configuration mode

Step 13 **control-plane**

Example:

```
Device(config)# control-plane
```

Enters control plane configuration mode.

Step 14 **service-policyinput** *policy-map-name*

Example:

```
Device(config-cp)# service-policy input Policy1
```

Attaches a policy map to a control plane.

Step 15 **exit**

Example:

```
Device(config-cp)# exit
```

Exits control plane configuration mode and returns to global configuration mode.

Step 16 **exit**

Example:

```
Device(config)# exit
```

Exits global configuration mode returns to privileged EXEC mode.

Configuring CoPP ACL Template

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **sdm prefer enable_acl_copp**
4. **exit**

DETAILED STEPS

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. • Enter your password if prompted.

	Command or Action	Purpose
Step 2	**configure terminal** **Example:** `Router# configure terminal`	Enter global configuration mode.
Step 3	**sdm prefer enable_acl_copp** **Example:** `Router(config)#sdm prefer enable_acl_copp`	Specify the ACL CoPP template to configure it on the Cisco Router. **Note** This command should be configured on the RSP3 module.
Step 4	**exit** **Example:** `Router(config)#exit`	Exit global configuration mode.

Configuring CoPP ACL Template

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **sdm prefer enable_acl_copp**
4. **exit**

DETAILED STEPS

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	**configure terminal** **Example:** `Router# configure terminal`	Enter global configuration mode.
Step 3	**sdm prefer enable_acl_copp** **Example:** `Router(config)#sdm prefer enable_acl_copp`	Specify the ACL CoPP template to configure it on the Cisco Router. **Note** This command should be configured on the RSP3 module.
Step 4	**exit** **Example:**	Exit global configuration mode.

	Command or Action	Purpose
	`Router(config)#exit`	

Configuration Examples for Control Plane Policing

Example: Configuring Control Plane Policing on Input Telnet Traffic

The following example shows how to apply a QoS policy for aggregate control plane services to Telnet traffic that is received on the control plane. Trusted hosts with source addresses 10.1.1.1 and 10.1.1.2 forward Telnet packets to the control plane but are still policed for a maximum rate.

All remaining Telnet packets are dropped by the control-plane.

```
! Define trusted host traffic.
DEVICE(config)#ip access-list extended telnet-trust
DEVICE(config-ext-nacl)#10 permit tcp host 10.1.1.1 any eq telnet
DEVICE(config-ext-nacl)#20 permit tcp host 10.1.1.2 any eq telnet
DEVICE(config-ext-nacl)#exit

! Define all other Telnet traffic.
DEVICE(config)#ip access-list extended telnet-drop
DEVICE(config-ext-nacl)#10 permit tcp any any eq telnet
DEVICE(config-ext-nacl)#exit

! Define class map for trusted hosts
DEVICE(config)#class-map match-all copp-trust
DEVICE(config-cmap)#match access-group name telnet-trust
DEVICE(config-cmap)#exit

! Define class map for un-trusted hosts
DEVICE(config)#class-map match-all copp-drop
DEVICE(config-cmap)#match access-group name telnet-drop
DEVICE(config-cmap)#exit

! Define the policy-map for both type of hosts
DEVICE(config)#policy-map control-plane-in
DEVICE(config-pmap)#class copp-trust
DEVICE(config-pmap-c)#police 1000000 conform-action transmit  exceed-action drop
DEVICE(config-pmap-c-police)#class copp-drop
DEVICE(config-pmap-c-police)#exit
DEVICE(config-pmap-c)#police 1000000 conform-action drop  exceed-action drop
DEVICE(config-pmap-c-police)#exit
DEVICE(config-pmap-c)#exit
DEVICE(config-pmap)#exit

! Define aggregate control plane service for the active route processor.
DEVICE((config)#control-plane
DEVICE(config-cp)#service-policy input control-plane-in
DEVICE(config-cp)#end


! Rate-limit all other Telnet traffic.
Device(config)# access-list 140 permit tcp any any eq telnet


! Define class-map "telnet-class."
Device(config)# class-map telnet-class
```

```
Device(config-cmap)# match access-group 140
Device(config-cmap)# exit
Device(config)# policy-map control-plane-in
Device(config-pmap)# class telnet-class
Device(config-pmap-c)# police 80000 conform transmit exceed drop
Device(config-pmap-c)# exit
Device(config-pmap)# exit

! Define aggregate control plane service for the active route processor.
Device(config)# control-plane
Device(config-cp)# service-policy input control-plane-in
Device(config-cp)# end
```

Verification Examples for CoPP

The following example shows how to verify control plane policing on a policy map.

```
Router# show policy-map control-plane
           Control Plane
         Service-policy input: control-plane-in
         Class-map: telnet-class (match-all)
           10521 packets, 673344 bytes
           5 minute offered rate 18000 bps, drop rate 15000 bps
           Match: access-group 102
           police:  cir 64000 bps, bc 8000 bytes
           conformed 1430 packets, 91520 bytes; actions:
           transmit
           exceeded 9091 packets, 581824 bytes; actions:
           drop
          conformed 2000 bps, exceeded 15000 bps
     Class-map: class-default (match-any)
           0 packets, 0 bytes
           5 minute offered rate 0000 bps, drop rate 0000 bps
          Match: any
```

The following command is used to verify the TCAM usage on the router.

```
Router# show platform hardware pp active feature qos resource-summary 0
RSP3 QoS Resource Summary

Type Total Used Free
------------------------------------------------------------------------------
QoS TCAM 2048 2 2046
VOQs 49152 808 48344
QoS Policers 32768 2 32766
QoS Policer Profiles 1023 1 1022
Ingress CoS Marking Profiles 16 1 15
Egress CoS Marking Profiles 16 1 15
Ingress Exp & QoS-Group Marking Profiles 64 3 61
Ingress QOS LPM Entries 32768 0 32768
```

Additional References

Related Documents

Related Topic	Document Title
Cisco IOS commands	https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/mcl/allreleasemcl/all-book.html

Standards and RFCs


Standard/RFC	Title
No specific Standards and RFCs are supported by the features in this document.	—

MIBs

MIB	MIBs Link
—	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

Technical Assistance

Description	Link
The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies. To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds. Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.	http://www.cisco.com/cisco/web/support/index.html

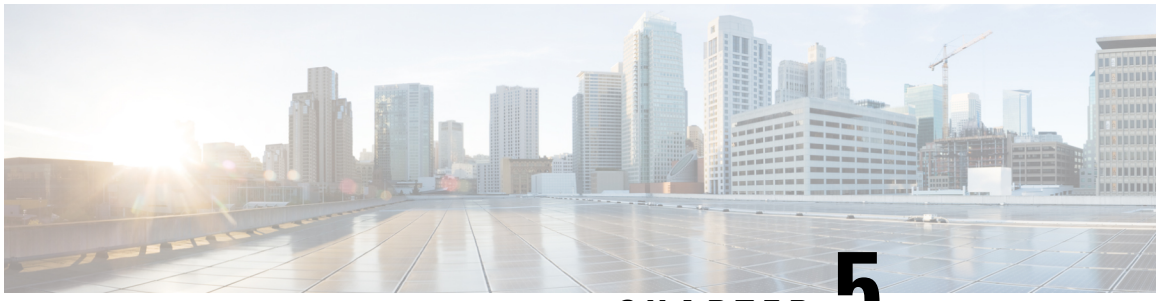

CHAPTER 5

QoS Overhead Accounting

Overhead accounting enables the router to account for packet overhead when shaping traffic to a specific rate. This accounting ensures that the router executes quality of service (QoS) features on the actual bandwidth that is used by subscriber traffic.

The overhead accounting feature enables the router to account for downstream Ethernet frame headers when applying shaping to packets. The traffic scheduler allows a minimum amount of value more than the configured rate at the port, in addition to the excess bytes configured on that port.

- Restrictions for QoS Overhead Accounting, on page 45
- OH Accounting Support for L3VPN, on page 46
- How to Configure QoS Overhead Accounting, on page 47
- Applying Overhead Accounting on a Particular Interface, on page 47
- Configuring Number of Bytes to be Accounted, on page 47
- Configuring Overhead Accounting for MPLS Imposition, on page 47
- Verifying Overhead Accounting compensation, on page 47
- Apply OH Accounting on a Particular L3VPN Interface, on page 48
- Configure Number of Bytes to be Accounted, on page 48
- Verify OH Accounting Compensation, on page 48

Restrictions for QoS Overhead Accounting

- Accounting feature is supported only for the following scenarios:
  - MPLS imposition
  - MPLS disposition
- Accounting feature can be enabled per interface and only one value of compensation bytes can be configured globally.
- The feature is applied in the following scenarios:
  - Per interface QoS overhead accounting can take effect only during a policy-map detach or attach process.
  - Any dynamic modification, for example, enabling or disabling on an interface or change in global compensation bytes can reflect per interface only after a policy-map detach or attach process.

- Already configured policy-map on the accounting enabled interface needs to be detached and reattached.

- While detaching, ensure to perform the following tasks:
  - Detach the policy-map per interface.
  - Disable the accounting feature for that interface.
  - Re-attach the policy-map based on the requirement.

- QoS overhead accounting is not supported for port channel interface and member links.
- QoS overhead accounting is not supported for trunk EFPs on an interface.
- Accounting is not supported if interface has Ethernet loopback that is enabled.

OH Accounting Support for L3VPN

Table 3: Feature History

Feature Name	Release Information	Feature Description
OH Accounting Support for L3VPN	Cisco IOS XE Cupertino 17.7.1	This feature enables OverHead (OH) accounting support for L3VPN traffic. This feature adds a header value and helps to match the Tx and Rx rates during a packet transfer.

Prior to Cisco IOS XE Cupertino release 17.7.1, OverHead (OH) accounting was only supported for native IP traffic and L2VPN.

Starting with Cisco IOS XE Cupertino release 17.7.1, OH accounting is also supported for L3VPN traffic. When a minimal packet size is transferred, the Transmission Traffic (Tx) rate gets reduced and you receive a reduced Receiving Traffic (Rx) rate. You do not experience any packet drop and this phenomenon is referred to as header compression.

This feature adds a header value to match the Tx and Rx rates. The header value or compensation range is from —48 to +48 bytes. Thus, it is useful when the traffic rate is calcuated based on the Tx and Rx rates.

This feature is *only* supported on NCS 4206 routers.



Note The restrictions for layer 2 OH accounting also apply to layer 3 OH accounting.

How to Configure QoS Overhead Accounting

Applying Overhead Accounting on a Particular Interface

To apply overhead accounting on a particular interface, for example layer 2 interface and MPLS disposition, enter the following commands:

```
Router> enable
Router# configure terminal
Router(config)# qos-overhead-accounting enable gi 0/0/0
```

Configuring Number of Bytes to be Accounted

To configure the number of bytes that need to be accounted, enter the following commands:

```
Router> enable
Router# configure terminal
Router(config)# qos-overhead-accounting positive 8
```

Configuring Overhead Accounting for MPLS Imposition

To configure compensation for the MPSL imposition with access interface as gig 0/0/0 and core port as gig 0/0/1, enter the following steps:

```
Router> enable
Router# configure terminal
Router(config)# qos-overhead-accounting enable gi 0/0/1
Router(config)# qos-overhead-accounting positive 8
Router(config)# qos-overhead-accounting enable gi 0/0/0
```

To disable the compensation, enter the following commands:

```
Router> enable
Router# configure terminal
Router(config)#no qos-overhead-accounting enable gi 0/0/1
Router(config)#no qos-overhead-accounting enable gi 0/0/0
```

Verifying Overhead Accounting compensation

Use the following show command to display the set of interfaces on which overhead accounting is enabled:

```
Router#show platform hardware pp active feature qos oh-accounting interface all
Overhead Accounting Target Info
Interface Name                 GID    Status    Bytes (Shadow)   Bytes (Actual)
-------------------------------------------------------------------------------
```

```
GigabitEthernet0/0/0            269    Enabled    8                8
```

Apply OH Accounting on a Particular L3VPN Interface

To apply overhead accounting on a particular L3VPN interface:

```
Router> enable
Router# configure terminal
Router(config)# qos-overhead-accounting enable gi 0/0/0
```

Configure Number of Bytes to be Accounted


To configure the number of bytes to be accounted for the L3VPN interface:

```
Router> enable
Router# configure terminal
Router(config)# qos-overhead-accounting positive/negative value
```

Verify OH Accounting Compensation

Use the following show command to display the set of L3VPN interfaces on which overhead accounting is enabled:

```
Router#show platform hardware pp active feature qos oh-accounting interface all
Overhead Accounting Target Info
Interface Name                  GID    Status    Bytes (Shadow)   Bytes (Actual)
-------------------------------------------------------------------------------
GigabitEthernet0/0/0            269    Enabled    8                8
```

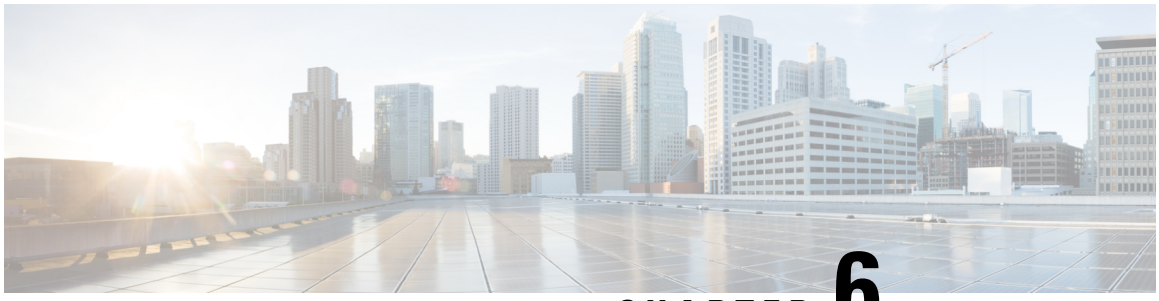

CHAPTER 6

Policer Adjustment in QoS Policy Map

Policers are configured usually at a value range of 64,000–10 G whereas the hardware policer is programmed only to discrete value. The policer rate received is less than that of the configured CIR and PIR values. The policer adjustment feature is added to adjust the CIR and PIR values of hardware policer either to match the configured value or to the next higher value available in hardware.

The policer adjustment feature is supported on the RSP3 module.

To enable policer adjustment, use the **platform qos-adjust-policer enable** at the global configuration mode for a table map. You can view the **show platform hardware pp active feature QoS interface** command to compare the configured values of CIR and PIR values in the qos-policy and the actual programmed values in hardware.

With the policer adjustment feature, the policer rate is compensated with + 0 to + 0.5 to the configured policer rate so that you can achieve the received rate more than or equal to that of the configured rate.

- Restrictions for Policer Adjustment, on page 49
- How to configure Policer Adjustment, on page 50

Restrictions for Policer Adjustment

- Policy adjustment is performed at a global configuration level and it is not supported on each port or EFP.
- Detaching and attaching of policer from ports after applying the policy adjustment feature at a global configuration works for applied ports. For the remaining ports to which detaching and attaching is not performed after enabling the policy adjustment works in a legacy QoS functionality manner.
- Policer enhancement is supported on EFP, TEFP, routed port, and port channel.
- BC or BE values are not adjusted, and only CIR and PIR or EIR are adjusted. Even if BC or BE values are configured, the values that are displayed in the show command do not match exactly with IOS values.
- CIR rates 64,000–3,00,000 can have rates more than 0.5 percent as this rate limits to already available percent and effects higher rates.

How to configure Policer Adjustment

Enabling Policer Adjustment

To enable a policer adjustment at the global configuration mode, enter the following command:

```
Router> enable
Router# configure terminal
Router(config)# platform qos-adjust-policer enable
```

Note After enabling the policer adjustment, you must detach and attach the policer from port, then only the feature is applied on the port.

To disable the policer adjustment globally, enter the no form of the following command:

```
{no} platform qos-adjust-policer enable
```

Note After disabling the policer adjustment, you need to detach and attach the existing policy-map from the port or service. Only then will the policer adjustment be disabled.

Disabling Policer Adjustment

To disable the policer adjustment globally, enter the no form of the following command:

```
{no} platform qos-adjust-policer enable
```

After disabling the policer adjustment, you need to detach and attach the existing policy-map from the port or service and then only the policer adjustment is disabled.

Viewing QoS Policer Values for Ingress Traffic

To view the software and ASIC QoS policer values for egress traffic, use the following command:

show platform hardware pp active feature QoS interface *{interface-type interface-number}* **service-instance** *{service-instance-id}* **input**

```
Router# show platform hardware pp active feature qos interface te 0/0/13 ser 2 in

Policy details:

Interface: TenGigabitEthernet0/0/13
Policy: TMO-EVC
Service instance number: 2
Direction: input
------------------------------------------------------------------
Class: EVC, Level: 2
```

```
Policer Mode: IETF_2R3C
Policer Index Id: 33
Policer Profile Id: 12
Policer feature         Software value             Asic value
CIR                        5000000 kbps             5062500 kbps
PIR                        7000000 kbps                  NA
EIR (PIR - CIR)            2000000 kbps             2024884 kbps
BC                         2500000 bytes            2500000 bytes
BE                        16000000 bytes           16000000 bytes
```

Monitoring QoS Policer Values

The QoS policer values provide crucial insights about the network performance.

- The configured QoS policer values are also referred to as software values.
- The hardware-programmed QoS policer values are also referred to as ASIC values.

The software values might differ from the ASIC values due to hardware limitations. The ASIC may round the software values to the nearest or next higher supported value, ensuring compatibility and efficient application of QoS policies.

Understanding the differences between software and ASIC QoS policer values is essential for network optimization. Regular review and fine-tuning of these settings ensure that applications receive the necessary bandwidth, priority, and resources. Recognizing these differences is also crucial for troubleshooting. Comparing the values can help identify the root cause and resolve performance problems more effectively.

Configuring the display of ASIC QoS Policer Values for Egress Traffic

Table 4: Feature History

Feature Name	Release Information	Description
Displaying ASIC QoS Policer Values for Egress Traffic	Cisco IOS XE 17.15.1b	In addition to Ingress traffic, you can now view the programmed hardware (ASIC) values of the QoS features configured for Egress traffic. Use the following command to enable ASIC values: `platform qos-egress-hw-param enable` The programmed hardware (ASIC) value may differ from the configured software value due to hardware limitations. Now, you can compare the actual QoS policer value programmed in the hardware with the value you configured in the software for egress traffic.

Viewing the ASIC values for egress traffic is a two-step process.

1. Enabling the display of ASIC values for egress traffic
2. Viewing ASIC values for egress traffic

Enabling the display of ASIC Values for Egress Traffic

The following example shows how to enable the display of ASIC values:

```
Router> enable
Router# configure terminal
Router(config)# platform qos-egress-hw-param enable
```

To disable the display of ASIC values for egress traffic, enter the no form of the following command:

```
{no} platform qos-egress-hw-paramenable
```

Viewing ASIC Values for Egress Traffic

To view the software and ASIC QoS policer values for egress traffic, use the following command:

show platform hardware pp active feature QoS interface *{interface-type interface-number}* **service-instance** *{service-instance-id}* **output**

```
Router# show platform hardware pp active feature qos interface
GigabitEthernet0/1/0  service-instance 10 output
Policy details:

Interface: GigabitEthernet0/1/0
Policy: EGRESS
Service instance number: 10

Direction: outpu
------------------------------------------------------------------------
Class:                           Parent_EGR      Level: 1
Egress QueueId:                    NA
Queueing Feature           Software Value            Asic Value
Priority level:                  NA                    NA
Shape PIR (in kbps):           1000000               1000000
Shape PIR burst (in bits):     18432                   18432
Bandwidth:                       NA                    NA
Inverse Bandwidth Ratio:         NA                    NA
Queue-limit:                     NA                    NA
------------------------------------------------------------------------
Class:                           Parent_EGR            Level: 2
Egress QueueId:                    NA
Queueing Feature           Software Value            Asic Value
Priority level:                  NA                    NA
Shape PIR (in kbps):           700000                700000
Shape PIR burst (in bits):     7000000               7000000
Bandwidth:                       NA                    NA
Inverse Bandwidth Ratio:         NA                    NA
Queue-limit:                     NA                    NA
------------------------------------------------------------------------
Class:                           qos_group1            Level: 3
Egress QueueId:                    8729
Queueing Feature           Software Value            Asic Value
Priority level:                  1                     1
Shape PIR (in kbps):           140000                140000
Shape PIR burst (in bits):     28000112              28000112
Bandwidth:                     140000                140000
Inverse Bandwidth Ratio:         NA                    NA
Queue-limit:                   525000                525312
------------------------------------------------------------------------
```

```
Class:                          qos_group2              Level: 3
Egress QueueId:                 8730
Queueing Feature          Software Value            Asic Value
Priority level:                 2                         2
Shape PIR (in kbps):            210000                  210000
Shape PIR burst (in bits):      40000112                40000112
Bandwidth:                      200000                  200000
Inverse Bandwidth Ratio:          NA                      NA
Queue-limit:                    200000                  200000
------------------------------------------------------------------------
Class:                          qos_group3              Level: 3
Egress QueueId:                 8731
Queueing Feature          Software Value            Asic Value
Priority level:                   NA                      NA
Shape PIR (in kbps):            700000                  700000
Shape PIR burst (in bits):      7000000                 7000000
Bandwidth:                      140000                  140000
Inverse Bandwidth Ratio:        20                      20
Queue-limit:                    1024000                 1024000
------------------------------------------------------------------------
Class:                          qos_group4              Level: 3
Egress QueueId:                 8732
Queueing Feature          Software Value            Asic Value
Priority level:                   NA                      NA
Shape PIR (in kbps):            700000                  700000
Shape PIR burst (in bits):      7000000                 7000000
Bandwidth:                      70000                     70000
Inverse Bandwidth Ratio:        10                        10
Queue-limit:                    1024000                 1024000
------------------------------------------------------------------------
Class:                          class-default           Level: 3
Egress QueueId:                 8728
Queueing Feature          Software Value            Asic Value
Priority level:                   NA                      NA
Shape PIR (in kbps):            1000000                 1000000
Shape PIR burst (in bits):      18432                   18432
Bandwidth:                        0                         0
Inverse Bandwidth Ratio:          1                         1
Queue-limit:                    1677721                 1678336
WRED parameters for Green Color:
Minimum Threshold: 1500000 bytes,       Maximum Threshold: 1677721 bytes
Mark probability:  10
WRED parameters for Yellow Color:
Minimum Threshold: 0 bytes,     Maximum Threshold: 0 bytes
Mark probability:  10
########################################################################
LIF Profile Number: 0
IVE Profile Number: 0
EVE Profile Number: 0
```