


Cisco Catalyst IW9167I Heavy Duty Access Point Software Configuration Guide, Cisco IOS XE 17.18.x

First Published: 2025-08-08

Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
http://www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

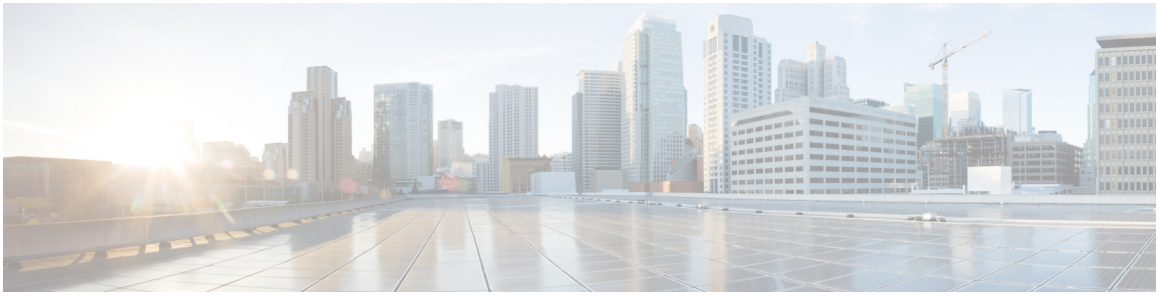

CONTENTS

CHAPTER 1 **Introduction** 1

Overview of the Access Point 1

Related Documentation 2

CHAPTER 2 **Configure Indoor Deployment** 3

Indoor deployment 3

Enable indoor mode 3

Disable indoor mode 4

Verify the indoor deployment of an access point 4

CHAPTER 3 **6 GHz Low Power Indoor AP Support** 5

6 GHz low power indoor AP support 5

Enable 6 GHz low power indoor mode 5

Verify 6 GHz low power indoor 6

CHAPTER 4 **AFC Support for 6 GHz Standard Power Mode** 9

AFC support for 6 GHz standard power mode 9


Verify AFC status on an AP 10

CHAPTER 5 **Mesh Support** 11

Mesh support 11

Configure the Bridge mode 12

Verify Bridge mode on a Wireless Controller 12

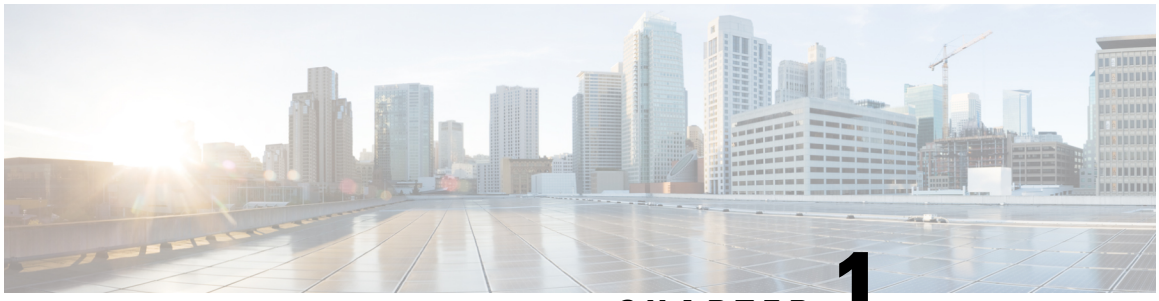

CHAPTER 1

Introduction

- Overview of the Access Point, on page 1
- Related Documentation, on page 2

Overview of the Access Point

The Cisco Catalyst IW9167I Heavy Duty Access Point (IW9167I) is a robust wireless device designed for outdoor and industrial environments, featuring a durable cast-aluminum case and built-in antenna for high-throughput connectivity.

- Supports Wi-Fi 6 and 6-GHz hardware for Wi-Fi 6E deployments, providing up to 1.2 GHz additional spectrum.
- Operates in multiple CAPWAP AP modes: Local, Flexconnect, Sniffer, Monitor, and Site survey.

Supported features and deployment information

The IW9167I is engineered for reliable wireless connectivity in challenging environments, offering advanced features and flexible deployment options.

- Cast-aluminum enclosure for protection against water, dust, and extreme temperatures
- Built-in antenna for high-density Wi-Fi client support
- Wi-Fi 6E support for increased capacity and reduced interference

The IW9167I access point can operate in multiple modes, each tailored for specific deployment scenarios and requirements.

- **Local mode** : The default mode where the AP serves clients, creating two CAPWAP tunnels (management and data) to the controller for central switching.
- **Flexconnect mode** : Data traffic is switched locally, not sent to the controller. The AP behaves like an autonomous AP but is managed by the controller and continues to function if the controller connection is lost.
- **Sniffer mode** : The AP captures and forwards all client packets on a given channel to a remote machine running packet analyzers such as Airopeek or Wireshark, including details like timestamp, signal strength, and packet size.

Note In sniffer mode, the server receiving the data must be on the same VLAN as the wireless controller management VLAN; otherwise, an error message is displayed.

- **Monitor mode** : The AP acts as a dedicated sensor for location-based services, rogue AP detection, and intrusion detection, without serving client data traffic.
- **Site Survey mode** : The AP GUI is enabled for configuring RF parameters during site survey investigations. For more information, see the Access Points Survey Mode section in the *Cisco Catalyst 9800 Series Wireless Controller Software Configuration Guide* .

For more information about configuring the AP on the Wireless Controller, see the Cisco Catalyst 9800 Series Wireless Controller Software Configuration Guide .

Related Documentation


This topic provides links and references to additional documentation and support resources for the Cisco Catalyst IW9167I Heavy Duty Access Point.

To view all support information for the Cisco Catalyst IW9167I Heavy Duty Access Point, see https://www.cisco.com/c/en/us/support/wireless/catalyst-iw9167-series/series.html .

In addition to the documentation available on the support page, you will need to refer to the following guides:

- For information about IW9167I hardware, see *Cisco Catalyst IW9167I Heavy Duty Access Point Hardware Installation Guide* .
- A full listing of the AP's features and specifications is provided in Cisco Catalyst IW9167 Heavy Duty Series Data Sheet .
- For more information about the configuration on Cisco Catalyst 9800 Series Wireless Controllers, see https://www.cisco.com/c/en/us/support/wireless/catalyst-9800-series-wireless-controllers/products-installation-and-configuration-guides-list.html .
- For more information about Cisco IOS XE, see the relevant documents at:

  http://www.cisco.com/c/en/us/products/ios-nx-os-software/ios-xe/index.html

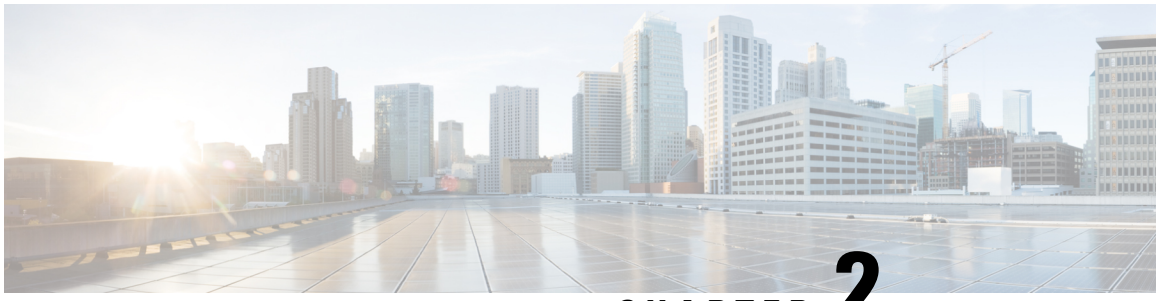

CHAPTER 2

Configure Indoor Deployment

- Indoor deployment, on page 3
- Enable indoor mode, on page 3
- Disable indoor mode, on page 4
- Verify the indoor deployment of an access point, on page 4

Indoor deployment

From IOS XE Release 17.12, IW9167IH supports indoor deployment for -E and -ROW(GB) domains.

Table 1: Domains and countries cupporting indoor deployment

PID	Description
IW9167IH-E	EU domain
IW9167IH-ROW (GB)	ROW domain configured with the GB country code

The -E and -ROW(GB) domains support U-NII-2C (excludes channel 144). Indoor deployment involves U-NII-1 and U-NII-2A to channel list.

When indoor deployment is disabled, 5G radio supports channels 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140.

When indoor deployment is enabled, 5G radio supports channels 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140.

Enable indoor mode

This procedure describes how to enable indoor mode using the wireless controller.

Procedure

Use the **ap name** *ap-name* **indoor** command to enable the indoor mode.

Example:

```
Device# ap name ap-1 indoor
```

This command causes the AP to reboot. Once the AP has rebooted and registered with the wireless controller, assign the appropriate country code to the AP.

Disable indoor mode

This procedure describes how to disable indoor mode on the AP.

Procedure

Use the **ap name** *ap-name* **no indoor** command to disable the indoor mode.

Example:

```
Device# ap name ap-1 no indoor
```

Verify the indoor deployment of an access point

This procedure describes how to verify the indoor deployment using **show** commands.

Procedure

Use the **show ap name** *ap-name* **config general | inc Indoor** command on the device to check the indoor deployment status.

Example:


```
Device# show ap name ap-1 config general | inc Indoor
```

The following is a sample output when the indoor deployment is enabled:

```
AP Indoor Mode                                  : Enabled
```

The following is a sample output when the indoor deployment is disabled:

```
AP Indoor Mode                                  : Disabled
```

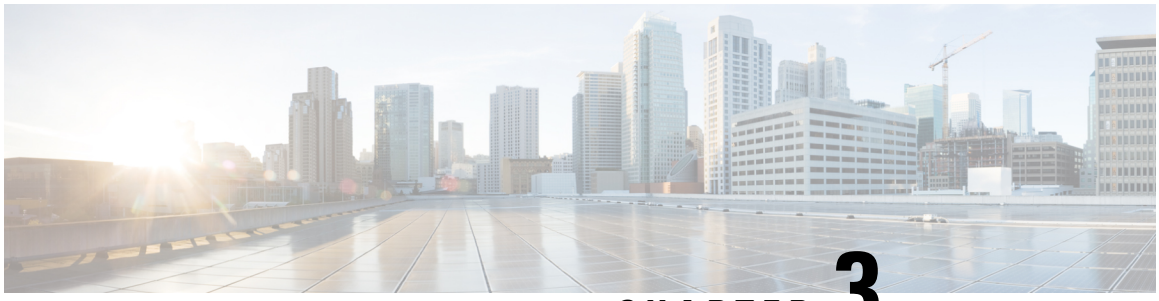

CHAPTER 3

6 GHz Low Power Indoor AP Support

- 6 GHz low power indoor AP support, on page 5
- Enable 6 GHz low power indoor mode, on page 5
- Verify 6 GHz low power indoor, on page 6

6 GHz low power indoor AP support

Starting from IOS XE Release 17.12, IW9167I access points can operate in low power indoor mode in the EU and United Kingdom.

- Available for IW9167IH-E and IW9167IH-ROW (GB) models.
- Supports only the U-NII-5 sub channel lists (5925MHz - 6425MHz) in the Wi-Fi 6E band.
- Applicable for deployments in the EU and United Kingdom regions.

Starting with software version 17.18.1, 6 GHz radio broadcasting is supported on IW9167IH-ROW access points within the United Arab Emirates (UAE) regulatory domain. Software versions prior to 17.18.1 do not support 6 GHz operation in this regulatory domain.

Supported models and channel information for LPI mode

Only IW9167IH-E and IW9167IH-ROW (GB) can be configured as an indoor AP in LPI mode for the EU and United Kingdom. In this mode, only the U-NII-5 sub channel lists (5925MHz - 6425MHz) in the Wi-Fi 6E band are supported.

For more information about the Wi-Fi 6E band, see Wi-Fi 6E: The Next Great Chapter in Wi-Fi White Paper .

Enable 6 GHz low power indoor mode

This procedure describes how to enable IW9167I 6 GHz LPI mode.

Procedure

Step 1 Use the **show ap summary** command to verify that the access point PID is either IW9167IH-E or IW9167IH-ROW (GB).

```
Device# show ap summary

Number of APs: 2
CC = Country Code
RD = Regulatory Domain
AP Name          Slots AP Model  Ethernet MAC    Radio MAC      CC   RD  IP Address     State
Location
-------------------------------------------------------------------------------------------------------------
APFC58.9A17.0F14 3     IW9167IH-E fc58.9a17.0f14  fc58.9a17.11a0 DE   -E 192.168.57.102 Registered
default location

APFC58.9A17.E640 3     IW9167IH-E fc58.9a17.e640  fc58.9a17.ec00 DE   -E 192.168.57.101 Registered
default location
```

Step 2 Configure the AP to indoor mode, see Enable indoor mode, on page 3 .

Step 3 Use the **ap name** *ap-name* **no dot11 6ghz slot** *slot* **shutdown** command to configure 6 GHz radio.

```
Device# ap name APFC58.9A17.0F14 no dot11 6ghz slot 2 shutdown
```

Step 4 Use the **ap name** *ap-name* **dot11 6ghz slot** *slot* **channel** *channel* command to configure 6 GHz radio channel.

```
Device# ap name APFC58.9A17.0F94 dot11 6ghz slot 2 channel 33
```

Step 5 Use the **ap name** *ap-name* **dot11 6ghz slot** *slot* **channel width***width* command to configure 6 GHz radio width.

```
Device# ap name APFC58.9A17.0F94 dot11 6ghz slot 2 channel width 80
```

Verify 6 GHz low power indoor

This procedure describes how to verify the 6 GHz LPI configuration

Procedure

Step 1 Use the **show ap dot11 6ghz summary** command on the wireless controller.

Example:

```
Controller# show ap dot11 6ghz summary
* global assignment

AP Name            Mac Address    Slot Admin State Oper State Width Txpwr         Channel Mode
```

```
-----------------------------------------------------------------------------------------------
APFC58.9A17.0F14  fc58.9a17.11a0  2    Enabled     Up          80     1/8 (17 dBm) (33,37,41,45)
                            LOCAL
```

Step 2 Use the **show controllers dot11Radio 2 frequency** command on the AP to view the supported U-NII-5 sub channel lists in LPI mode within the Wi-Fi 6E band.


Example:

```
AP# show controllers dot11Radio 2 frequency

Configured Frequency: 6115Mhz Channel: 33 20MHz
Serving Frequency: 6115Mhz Channel: 33 20MHz
Allowed Frequency:
5955MHz(  1)  5975MHz(  5)  5995MHz(  9)  6015MHz( 13)  6035MHz( 17)
6055MHz( 21)  6075MHz( 25)  6095MHz( 29)
6115MHz( 33)  6135MHz( 37)  6155MHz( 41)  6175MHz( 45)  6195MHz( 49)
6215MHz( 53)  6235MHz( 57)  6255MHz( 61)
6275MHz( 65)  6295MHz( 69)  6315MHz( 73)  6335MHz( 77)  6355MHz( 81)
6375MHz( 85)  6395MHz( 89)  6415MHz( 93)
```

What to do next

For more configuration commands of Wi-Fi 6E band operation, see Configure and Verify Wi-Fi 6E Band Operations and Client Connectivity.

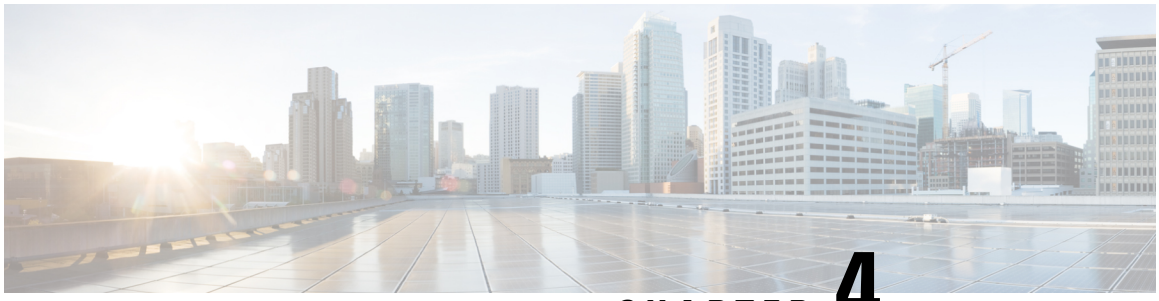

CHAPTER 4

AFC Support for 6 GHz Standard Power Mode

- AFC support for 6 GHz standard power mode, on page 9
- Verify AFC status on an AP, on page 10

AFC support for 6 GHz standard power mode

The Automated Frequency Coordination (AFC) 6 GHz Standard Power mode enables Cisco Catalyst IW9167I access points to operate in designated frequency bands with regulated power, coordinated through an AFC service.

- Standard power APs must obtain available frequencies and power levels from the AFC system before activation.
- The AFC system determines allowable frequencies and maximum power based on regulatory information (FCC for the United States and ISED for Canada).
- Transmission power is limited to a maximum of 36 dBm EIRP, and operation is permitted in specific UNII frequency bands.

Reference information for AFC 6 GHz standard power mode

The Cisco Catalyst IW9167I supports AFC 6 GHz Standard Power mode, requiring APs to coordinate with the AFC system for frequency and power assignments. The AFC system uses regulatory data and AP characteristics to model interference and assign channels.

- Standard power APs coordinate through an AFC service using AP location and antenna data to avoid interference.
- In the U.S., operation is allowed in the UNII-5 (5.925–6.425 GHz) and UNII-7 (6.525–6.875 GHz) bands.
- From Release 17.18.1, the -A (Canada) domain supports standard power using AFC in the UNII-5, UNII-6, and UNII-7 bands (5.925–6.875 GHz).

Table 2: Radio 6 GHz Power Mode Support

Deployment Mode	Low-power Indoor Support	Standard Power Support
Outdoor	No	Yes

Table 3: 6 GHz Target Power

Antenna Gain	Max Conducted per Path Power (SP/AFC)		Tx x Rx Chains	Max EIRP (SP/AFC)
	20-80 MHz	160 MHz		
5 dBi	10 dBm	10 dBm	4x4	21 dBm

Verify AFC status on an AP

This procedure describes how to verify the AFC request and response data, as well as the current operating power mode, on an AP using commands.

Procedure

Step 1 Use the **show rrm afc** command to verify the AFC request and response data on the AP.

Example:


```
Device# show rrm afc

Location Type: 1
Deployment Type: 2
Height: 129
Uncertainty: 5
Height Type: 0
Request Status: 5
Request Status Timestamp: 2023-08-31T06:20:17Z
Request Id Sent: 5546388983266789933
Ellipse 1: longitude: -121.935066 latitude: 37.512830 major axis: 43 minor axis:
9 orientation: 36.818100
AFC Response Request ID: 5546388983266789933
AFC Response Ruleset ID: US_47_CFR_PART_15_SUBPART_E
```

Step 2 Use the **show controllers dot11Radio 2 | i Radio** command to verify the current operating power mode.

Example:

```
Device# show controllers dot11Radio 2 | i Radio
Dot11Radio2     Link encap:Ethernet  HWaddr 24:16:1B:F8:06:C0
Radio Info Summary:
Radio: 6.0GHz (SP)
```

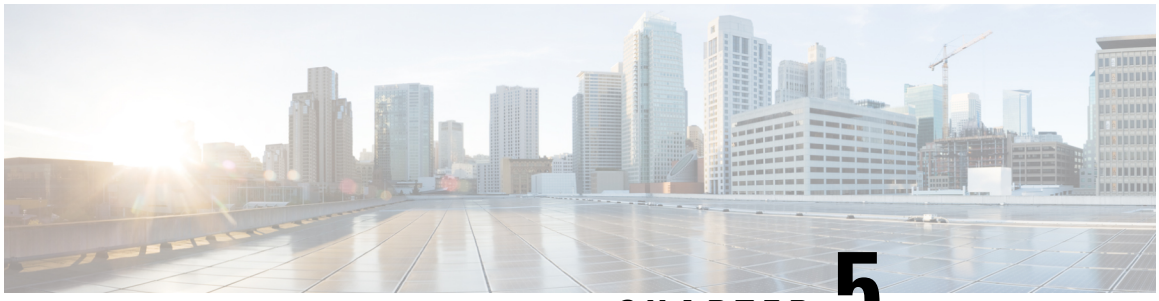

CHAPTER 5

Mesh Support

- Mesh support, on page 11
- Configure the Bridge mode, on page 12
- Verify Bridge mode on a Wireless Controller, on page 12

Mesh support

Mesh support enables the IW9167IH AP to operate in bridge or flex+bridge modes, extending wireless networks through mesh backhaul on both 2.4 GHz and 5 GHz frequencies.

- Supports bridge and flex+bridge modes for flexible deployment.
- Allows mesh backhaul using 2.4 GHz and 5 GHz frequencies.
- Enables point-to-point, point-to-multipoint, and mesh network topologies for indoor and outdoor environments.

Mesh support configuration and operational details

From Cisco IOS XE 17.15.1 release, the IW9167IH AP supports bridge or flex+bridge modes, extending the wireless network through mesh backhaul that supports both 2.4 GHz and 5 GHz frequencies.

Note Disable the 6 GHz radio before configuring the IW9167IH APs in bridge or flex+bridge mode. Enable the 6 GHz radio only when the IW9167IH APs are not in bridge or flex+bridge mode.

This feature allows rapid transitions between bridge and flex+bridge modes. When you run the **ap name IW9167IAP mode bridge** command, the AP automatically reboots and transitions to bridge or flex+bridge mode.

Note When issuing the **ap name IW9167IAP mode bridge** command while the AP is in local mode, the AP automatically reboots and switches to bridge mode. Similarly, when issuing the **ap name IW9167IAP mode bridge** command while the AP is in flex mode, the AP automatically reboots and switches to flex + bridge mode.

In bridge mode, APs can wirelessly form a point-to-point or point-to-multipoint bridge. As a result, APs in bridge mode can connect to different locations. Several APs can also create a mesh network for indoor or outdoor environments.

The flex+bridge mode enables FlexConnect capabilities on mesh (bridge mode) APs.

For information on configuring mesh on Catalyst 9800 Wireless Controllers, see the Configure Mesh on Catalyst 9800 Wireless LAN Controllers .

Configure the Bridge mode

This procedure describes how to configure the bridge mode on the wireless controller.

Procedure

Step 1 Use the **ap name** *ap-name* **mode bridge** command to change AP to bridge mode.

```
Controller# ap name IW9167IAP mode bridge
```

Step 2 (Optional) Use the **ap name** *ap-name* **mode clear** command to return or reset the AP from bridge mode back to local or flexconnect mode.

```
Controller# ap name IW9167IAP mode clear
```

Verify Bridge mode on a Wireless Controller

This procedure describes how to to view the AP mode and model details.

Procedure

Use the **show ap name** *ap-name* **config general** command on the wireless controller to view the AP mode and model details.

Example:

```
Controller# show ap name IW9167IAP config general

    AP Mode                                 : Bridge
    AP Model                              : IW9167IH-B                                : IW9167IH-B
```

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED “AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: https://www.cisco.com/c/en/us/about/legal/trademarks.html. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2025 Cisco Systems, Inc. All rights reserved.